



All Broadbands Green WiFi Router

N⁺Power Saving 3G/4G Broadband Router

RB-1842

User Manual V 1.0

FCC Statement



Federal Communication Commission Interference Statement This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

1. The device complies with Part 15 of the FCC rules. Operation is subject to the following conditions:
2. This device may not cause harmful interference, and this device must accept any interference received, including interference that may cause undesired operation.
3. FCC RF Radiation Exposure Statement: The equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
4. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
5. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

IMPORTANT NOTE

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

National Restrictions

Frequency range - 2400.0 - 2483.5 MHz

Country	Country	Reason/remark
Bulgaria	none	General authorization required for outdoor use and public service.
France	Outdoor use limited to 10 mW e.i.r.p. within the band 2454-2483.5 MHz	Military Radiolocation use. Refarming of the 2.4 GHz band has been ongoing in recent years to allow current relaxed regulation. Full implementation planned 2012.
Italy	none	If used outside of own premises, general authorization is required.
Luxembourg	none	General authorization required for network and service supply (not for spectrum).
Norway	Implemented	This subsection does not apply for the geographical area within a radius of 20 km from the centre of Ny-Ålesund.
Russian Federation	none	Only for indoor applications.

Note: Please don't use the product outdoors in France

CE Statement of Conformity

Our product has been tested in typical configuration by Ecom Sertech Corp and was found to comply with the essential requirement of "Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility" (89/336/EEC; 92/31/EEC; 93/68/EEC). The Declaration of Conformity can be found at the Sapido regional website. www.sapidotech.de

CE Information of Disposal




The electric and electronic equipment or unit which is labeled with crossed-out wheeled bin may not be disposed of with household waste. This mark is based on European Directive 2002/96/EC (for Waste Electric and Electronic Equipment=WEEE).

Please take it to the designated collection facilities. We will ensure the proper recycling, reuse and other forms of recovery of WEEE. WEEE has the potential effects on the environment and human health as a result of the presence of hazardous substances. You can contribute to eliminate these effects by your cooperation.

Safe Seating Gestures

You should follow the manufacturer's instructions for adjusting the backrest to fit your body properly.

- An adjustable chair that provides firm, comfortable support is best.
- Adjust the height of the chair so your thighs are horizontal and your feet flat on the floor.
- The back of the chair should support your lower back (lumbar region).

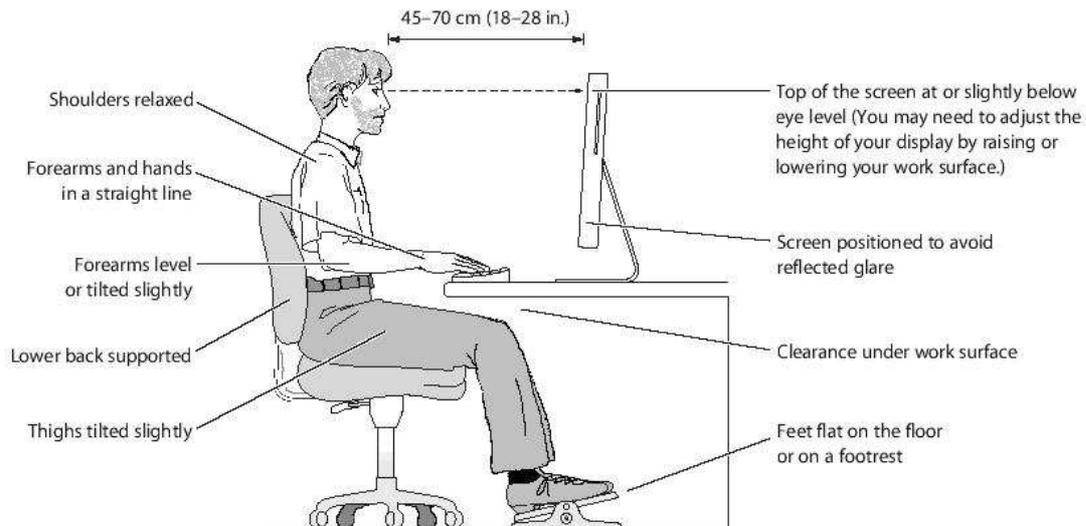

Copyright Statement

The products, including accessories and software are the property of SAPIDO Technology Inc. It is prohibited to reproduced, transcribed, transmitted and stored without authorization from SAPIDO. SAPIDO may update, revise, and change the contents of this manual without further notice. Users can visit the official website for reference. After reviewing this manual, if you have any problem or suggestion. You are welcome to contact us. Our Technical Support Engineer will reply related problem as soon as possible.

All trademarks and trade names are the properties of their respective owners.

Copyright© 2011 All Right Reserved by SAPIDO.

Warranty

One-Year Warranty is provided for consumer products. This warranty is subject to the conditions and limitations set forth herein. ("We") warrants and tests the Product to be free from defects in material and workmanship and to conform to published specifications. During the warranty period, should the Product fail under normal use in the recommended environment due to improper workmanship or materials, we will repair the Product or replace it with a comparable one. This warranty is for a specific period of time from the date of purchase. Proof of date of purchase is required. We will inspect the Product and make the decision regarding repair or replacement. We reserve the right to provide a functionally equivalent refurbished replacement Product.

This warranty does not apply to Product failure due to :

1. accident, abuse, and mishandling
2. any software against product manual
3. improper installation
4. any unfitted replacement
5. over allowable environment
6. alteration
7. improper usage
8. wires or parts oxidized

Table of Contents

Chapter 1	Introduction	9
1.1	Overview	9
1.2	Features	9
1.3	Specifications	10
1.4	Product Appearance	11
Chapter 2	System and Network Setup.....	12
2.1	Build Network Connection	12
2.1.1	Router Mode.....	12
2.1.2	AP Mode	13
2.1.3	Wi-Fi AP Mode.....	13
2.2	Connecting RB-1842	13
2.3	Network setup	14
2.3.1	Windows 2000.....	15
2.3.2	Windows XP	16
2.3.3	Windows Vista / Windows 7	17
2.4	Router IP Address Lookup.....	18
2.4.1	Log into Web GUI	19
Chapter 3	Internet Connection	21
3.1	Plug and Play.....	21
3.1.1	SmartPhone /iPhone Internet sharing plug and play	21
3.2	Router Mode- Using as a broadband router.....	23
3.2.1	WAN Interface- Ethernet Port	23
3.2.1.1	Static IP.....	23
3.2.1.2	DHCP Client	25
3.2.1.3	PPPoE	27
3.2.1.4	PPTP	28
3.2.1.5	L2TP.....	29
3.2.2	WAN Interface- 3.5G USB dongle	31
3.2.3	WAN Interface- Wireless	32
3.3	AP Mode-Using as a Access Point	33
3.4	WiFi AP Mode- Using as a Network Converter.....	35
Chapter 4	Wireless Setup	37
4.1	Wireless Setup	37
4.1.1	Setup Wireless LAN by WPS button.....	37
4.1.2	Wireless Basic Setup from Web GUI.....	40
4.1.2.1	Multiple APs	42

4.1.2.2	Enable Universal Repeater Mode	43
4.2	Wireless Security Setup	45
4.3	Wireless Access Control	47
Chapter 5	Router Mode Security Setup	50
5.1	NAT	50
5.1.1	Virtual Server	50
5.1.2	Virtual DMZ.....	51
5.2	Firewall.....	52
5.2.1	QoS	52
5.2.2	Port Filtering	54
5.2.3	IP Filtering	56
5.2.4	MAC Filtering	57
5.2.5	URL Filtering	58
Chapter 6	Advanced Setup	59
6.1	Dynamic DNS Setting Router	59
6.2	Wireless Advanced Setup	60
6.2.1	Wireless Site Survey WiFi-AP	62
6.2.2	WDS Settings Router AP	63
6.2.3	WPS Router AP	67
6.3	System Management	70
6.3.1	Change Password	70
6.3.2	Firmware Upgrade.....	71
6.3.3	Profile Save	72
6.3.4	Time Zone Setting	74
6.3.5	UPnP Setting	75
6.3.6	Language Setting	76
6.4	Log & Status	76
6.4.1	Network Config	77
6.4.2	Event Log	78
6.5	Logout	79
Chapter 7	DDNS Service Application.....	80
Chapter 8	Q & A	86
8.1	Installation	86
8.2	LED	86
8.3	IP Address.....	86
8.4	OS Setting.....	87
8.5	RB-1842 Setup.....	89
8.6	Wireless LAN	91

8.7	Support	93
8.8	Others.....	94
8.9	USB Device	94
Chapter 9	Appendices	95
9.1	Operating Systems	95
9.2	Browsers.....	95
9.3	Communications Regulation Information	95

Chapter 1 Introduction

1.1 Overview

The RB-1842 is a solution for multiple network interfaces. This router with 802.11n wireless technology which provides the best internet connection by auto-detecting the device connected to RB-1842 such as 3G/3.5G USB Dongle and xDSL/Cable broadband.

The entire wired/wireless network can share internet connection up to 7.2Mbps when connecting with 3G/3.5G USB Dongle. The RB-1842 has an impressive wireless data transmission rate of up to 150Mbps via IEEE802.11n technology. The physical WPS button also allows you to setup a secure wireless network more effectively and securely.

Moreover, by adopting latest, state-of-the-art WLAN technology, RB-1842 implements cutting-edge "Active-ECO" algorithm, which controls automatically the power consumption in accordance with WLAN and Ethernet activities. No setting or push-button required, RB-1842 saves up to 80% energy consumption than legacy 802.11n products without compromise performance.

1.2 Features


- With latest Green WLAN technology, no more setting or push-button required to save up to 80% energy without compromise performance.
- 3G USB external modem support
- Support iPhone, Smartphone to create a shared Internet environment without wasting phone power; answer calls, send e-mails, and charge the phone simultaneously.
- Auto WAN type detection brings the most convenience during installation
- Multiple SSID, Wi-Fi Protected Setup (WPS) button and WPA-PSK/WPA2-PSK support
- 150M 1T1R 802.11n WLAN, backward compatible with 802.11 b/g network
- Fail-over backup mechanism to ensure your network connectivity
- UPnP, QoS, VPN pass-through, advanced firewall security with port filter, URL blocking support

1.3 Specifications

Network	
Standards	Mobile (External): HSPA/UMTS/EVDO WLAN: IEEE 802.11n, 802.11g, 802.11b WAN: xDSL/Cable Modem
Data Rate	3.5G: Up to 7.2Mbps (Support 3G/3.5G/3.75G) WiFi: 802.11n (Max 150Mbps), 802.11g (Max 54Mbps), 802.11b (Max 11Mbps) LAN: 802.3/802.3u (10/100Mbps)
Frequency Range	2.412~2.484GHz
Wireless Security	WEP 64 or 128 bit/WPA/WPA2/WPA2 Mixed, WPS (PBC/PIN), WDS, Multiple APs
Session	20,000
Firewall	MAC Address Filtering, URL Filtering, IP/Port Based Filtering UPnP, DHCP, DDNS, DNS
Operation Modes	Router, AP, WiFi AP
Network Features	NAT: One-to-Many NAT, Virtual Server, DMZ
Hardware	
WAN	1x10/100Mbps RJ45, Auto-MDI/MDI-X
LAN	4x10/100Mbps RJ45, Auto-MDI/MDI-X
LED Indicator	Power, WAN, LAN (1~4), Wireless/WPS,
Power Adapter	DC 5V
Operating Temperature	Operating: 0°C ~40°C (32°F ~104°F) Storage: -20°C ~70°C (-4°F ~158°F)
Humidity	Operating: 10% to 85% Non-Condensing Storage: 5% to 90% Non-Condensing
Dimension	118 x 70 x 25 mm (4.65 x 2.75 x 0.98 inch) (Antenna not included)
Management	Web GUI, Firmware upgrade via web

1.4 Product Appearance


■ The Front

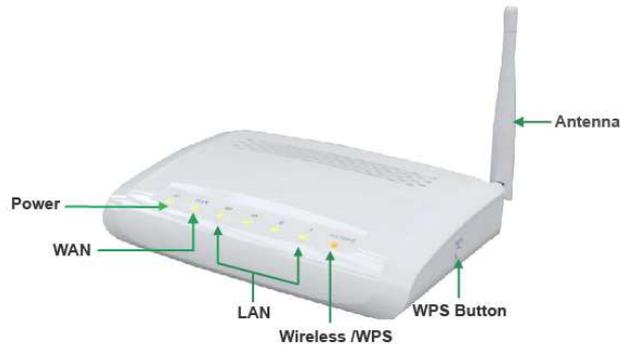

LED Indicator Status Description:

LED Indicator \ Status	Solid	Flashing
Power	Operation OK	Green: Reset / Firmware updates in progress
WAN	Ethernet connected	Transmitting Data
LAN (1~4)	Ethernet connected	Transmitting Data
WIRELESS & WPS	Operation OK	Green: Transmitting Data Orange: WPS enabled

■ The Rear

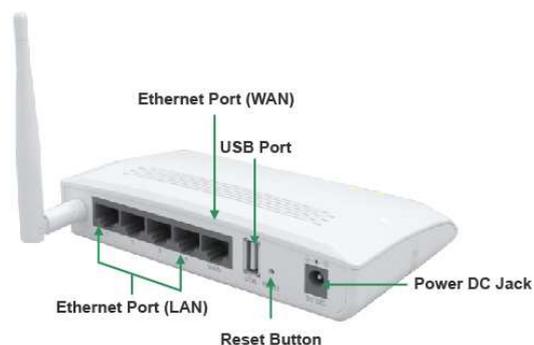

Ethernet Port (LAN 1~4)	RJ-45 Ethernet 10/100 Ports
Ethernet Port (WAN)	RJ-45 Ethernet 10/100 Port
USB Port	For 3G modem only
Reset Button	Press for back to factory default
Power DC Jack	DC 5V power in

Chapter 2 System and Network Setup

The **RB-1842** is an easy to setup and wireless device for various application and environment. It can be used in conference room, hotel, even in transportation.

To begin with **RB-1842**, you must have the following minimum system requirements. If your system can't correspond to the following requirements, you might get some unknown troubles on your system.

- Internet Account for XDSL/Cable Modem, broadband or 3G
- One Ethernet (10 BASE-T or 10/100 BASE-TX) network interface card.
- TCP/IP and at least one web browser software installed (E.g.: Internet Explorer 5.0, Netscape Navigator 7.x, Apple Safari 2.03 or higher version).
- At least one 802.11g (54Mbps) or one 802.11b (11Mbps) wireless adapter for wireless mobile clients.
- Recommended OS: WinXP, Visata or Win7 / Linux.


2.1 Build Network Connection

Administrator can manage the settings for WAN, LAN, Wireless Network, NTP, password, User Accounts, Firewall, etc.

Please confirmation the network environment or the purpose before setting this product.


2.1.1 Router Mode

Switch to router mode through web GUI when the first setup.

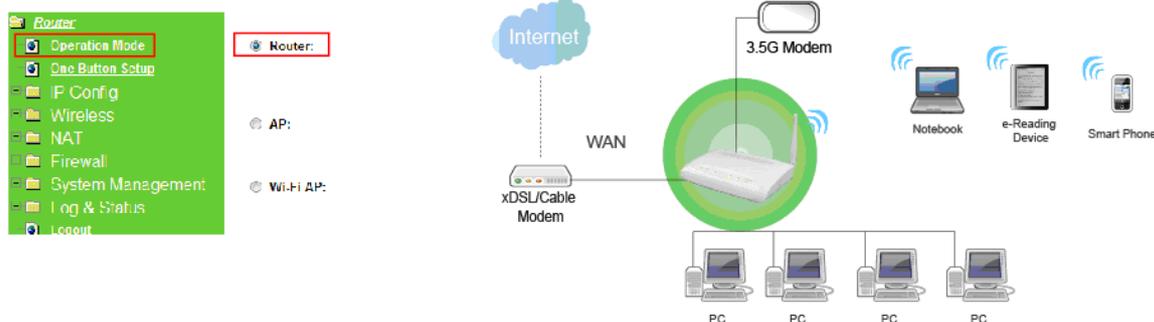


2.1.2 AP Mode

Switch to AP mode, if a router is already set at the house, and you want to make the wireless LAN communication.

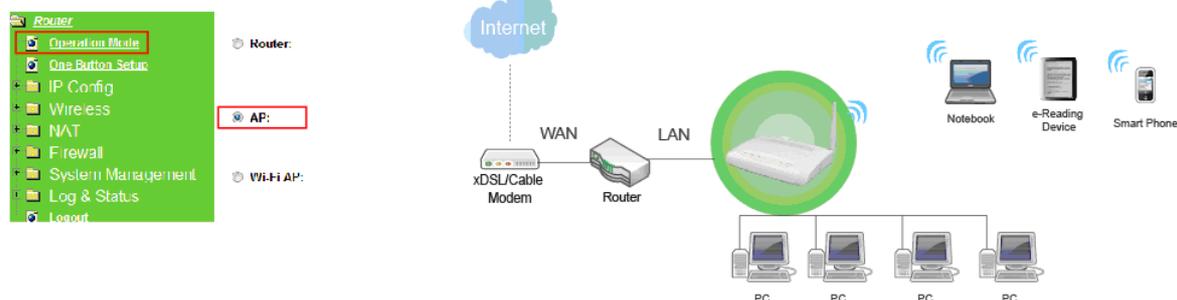

2.1.3 Wi-Fi AP Mode

Switch to WiFi AP Mode when you connect to the internet wirelessly through PC and wireless device without wireless LAN function equipped.

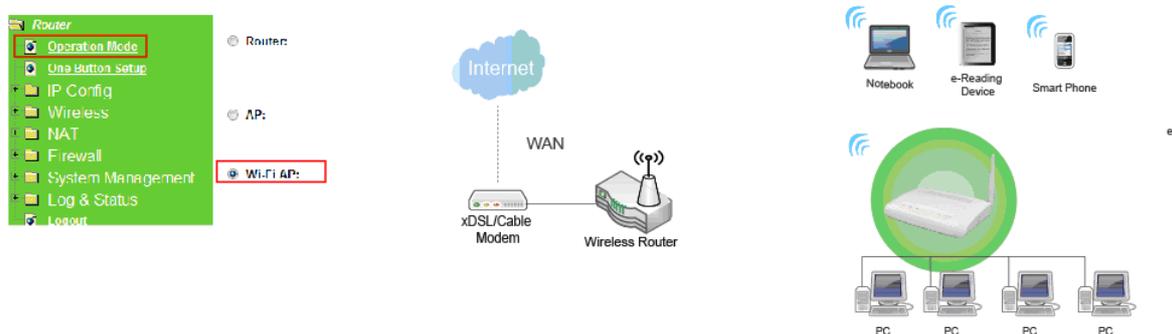

2.2 Connecting RB-1842

Prepare the followings before the connection:


- PC or Notebook for setup
- Ethernet cable or 3/3.5G modem

1. Make sure you are under “Router Mode”.



The image shows a login page for a router. At the top, there is an orange banner with the text "All Broadbands Green WiFi Router" and "N+ Power Saving 3G/4G Broadband Router". Below the banner, there is a red box containing the word "Router". Underneath, there are two input fields: "Username :" and "Password :". At the bottom, there is a "Login" button.

2. Connect **RB-1842** to xDSL/ Cable modem with the Ethernet cable, WAN to LAN.

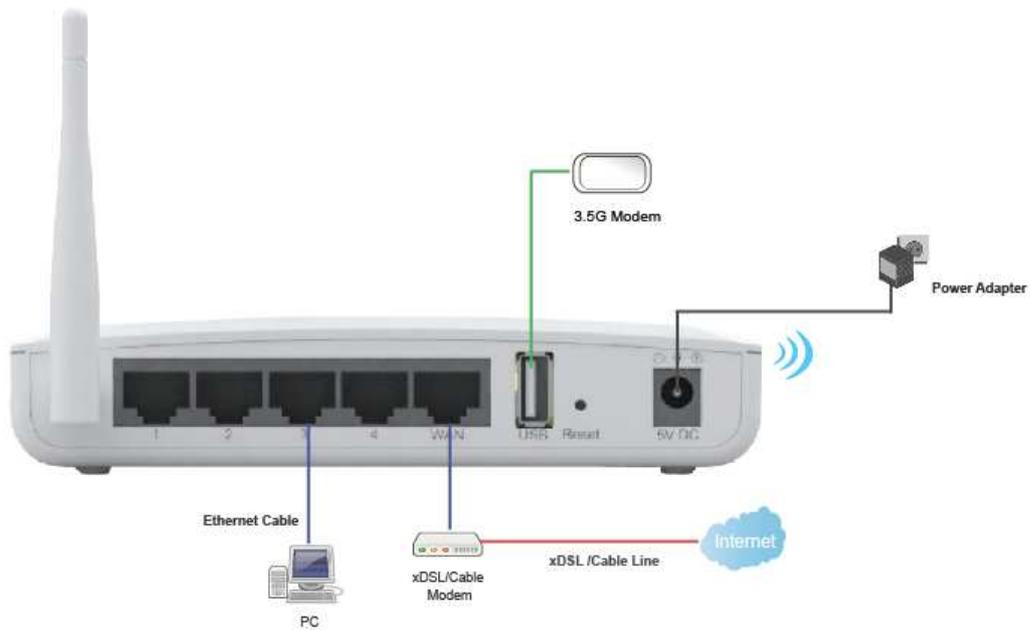

3. Turn on your Computer.



2.3 Network setup

After the network connection is built, the next step is setup the router with proper network parameters, so it can work properly in your network environment. Before you connect to the wireless router and start configuration procedures, your computer must be able to get an IP address from the wireless router automatically (use dynamic IP address). If it's set to use static IP address, or you're unsure, please follow the below instructions to configure your computer with dynamic IP address:

If the operating system of your computer is....


Windows 2000 - please go to section 2.3.1

Windows XP - please go to section 2.3.2


Windows Vista/Win7 - please go to section 2.3.3

2.3.1 Windows 2000

Click "Start" button (it should be located at lower-left corner of your computer), then click control panel. Double-click Network and Dial-up Connections icon, double click Local Area Connection, and Local Area Connection Properties window will appear. Select "Internet Protocol (TCP/IP)", then click "Properties".

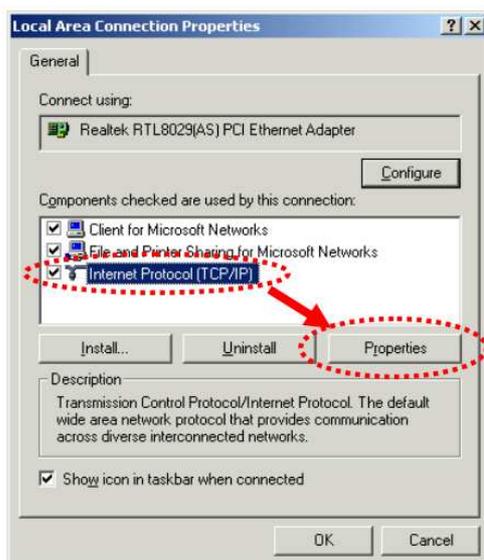


1. Select "Obtain an IP address automatically" and "Obtain DNS server address automatically", then click "OK".

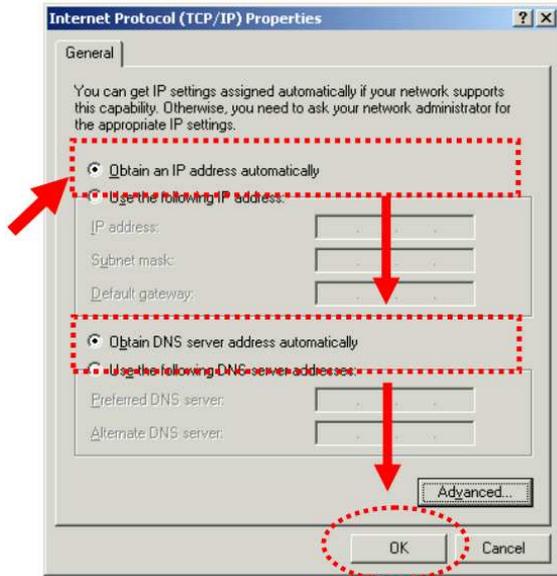


2.3.2 Windows XP

1. Click "Start" button (it should be located at lower-left corner of your computer), then click control panel. Double-click Network and Internet Connections icon, click Network Connections, then double-click Local Area Connection, Local Area Connection Status window will appear, and then click "Properties".

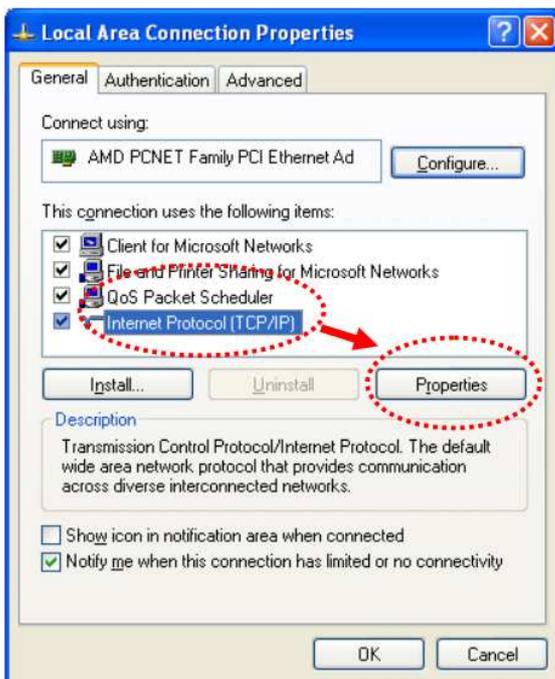


2. Select "Obtain an IP address automatically" and "Obtain DNS server address automatically", then click "OK".

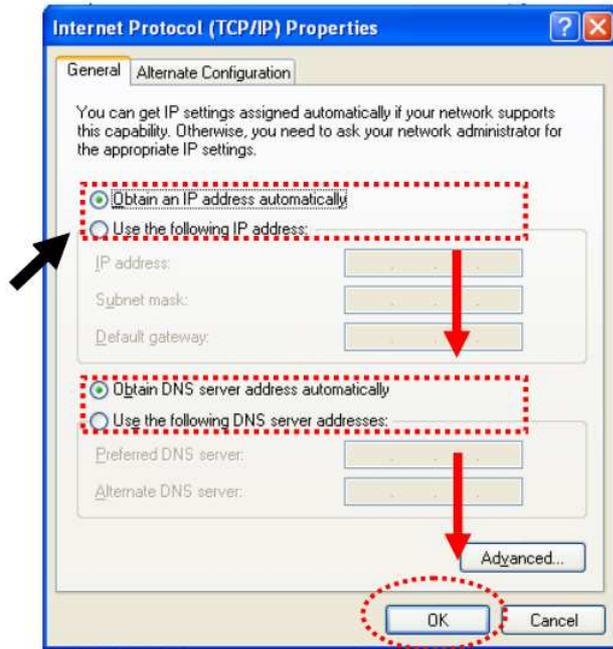


2.3.3 Windows Vista / Windows 7

1. Click "Start" button (it should be located at lower-left corner of your computer), then click control panel. Click View Network Status and Tasks, and then click Manage Network Connections. Right-click Local Area Network, then select "Properties". Local Area Connection Properties window will appear, select "Internet Protocol Version 4 (TCP / IPv4)", and then click "Properties".

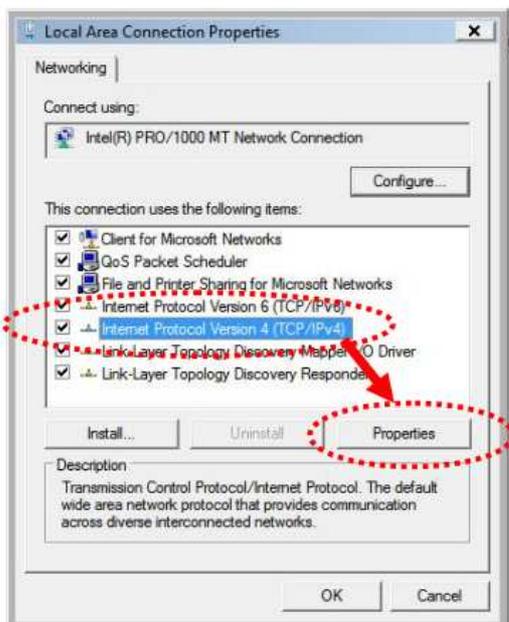

2. Select “Obtain an IP address automatically” and “Obtain DNS server address automatically”, then click “OK”.

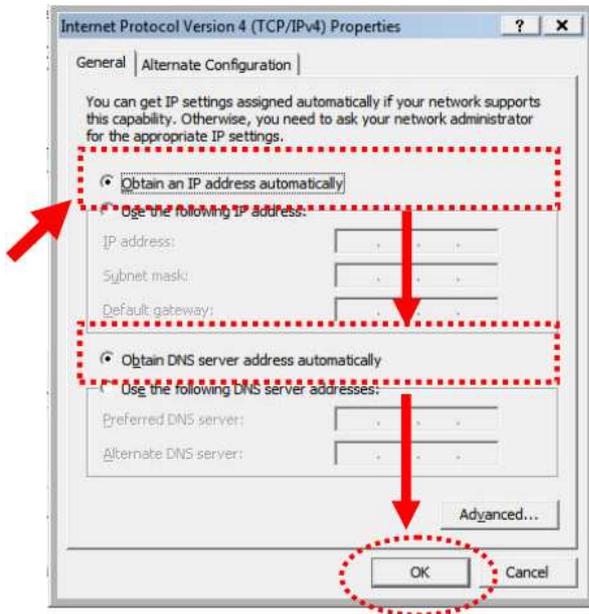


2.4 Router IP Address Lookup

After the IP address setup was completed, please clicks “start” → “run” at the bottom-lower corner of your desktop:



Input "cmd", and then click "OK".

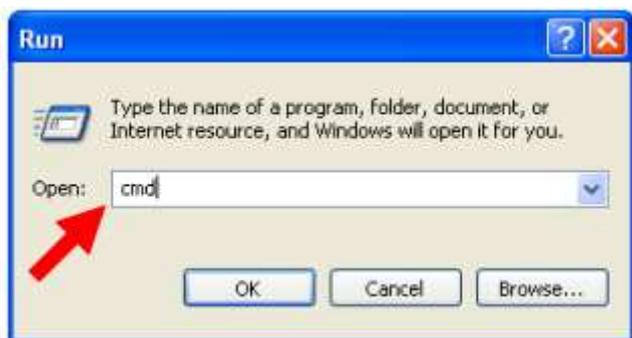

Input "ipconfig", then press "Enter" key. Please check the IP address followed by "Default Gateway" (In this example, the gateway IP address of router is 192.168.1.1)



NOTE: If the IP address of Gateway is not displayed, or the address followed by 'IP Address' begins with "169.x.x.x", please recheck network connection between your computer and router, and / or go to the beginning of this chapter, to recheck every step of network setup procedure.

2.4.1 Log into Web GUI

After your computer obtained an IP address from wireless router, please start your web browser, and input the IP address of the wireless router in address bar, and the following message should be shown. Please click "admin" to login the **RB-1842**.



Enter the User name and Password in to the blank and then Click **Login**. The default values for User Name and Password are **admin** (all in lowercase letters).

All Broadbands Green WiFi Router

N+ Power Saving 3G/4G Broadband Router

Router

Username :

Password :

All Broadbands
Green WiFi Router 

 SAPIDO

N+ Power Saving 3G/4G Broadband Router RB-1842

Menu

- Router
 - Operation Mode
 - One Button Setup
 - + IP Config
 - + Wireless
 - + NAT
 - + Firewall
 - + System Management
 - + Log and Status
 - Logout

Network Config

This page shows the current status and some basic settings of the device.

System	
Uptime	0day:0h:3m:40s
Firmware Version	Ver1.0.4
Wireless Configuration	
Mode	AP
Band	2.4 GHz (B+G+N)
SSID	All_Broadbands_Green_WiFi_Router
Channel Number	6
Encryption	Disabled
MAC Address	00:e0:4c:81:88:88
Associated Clients	0
LAN Configuration	
Attain IP Protocol	Fixed IP
IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
DHCP Server	Enabled
MAC Address	00:e0:4c:81:88:88
WAN Configuration	
Attain IP Protocol	3.5G Disconnected
IP Address	0.0.0.0
Subnet Mask	0.0.0.0
Default Gateway	0.0.0.0
MAC Address	00:e0:4c:81:88:89
3.5G Configuration	
Connect Speed	Auto Switch
Signal Strength	
Network Name	

Chapter 3 Internet Connection

This Chapter describes how to setup **RB-1842** to the internet. The RB-1842 is delivered with the following factory default parameters.

Default IP address: 192.168.1.1 (Router Mode)

192.168.1.254 (AP Mode)

192.168.1.254 (WiFi AP Mode)

Default IP subnet mask: 255.255.255.0

Web login user name: admin

Web login password: admin

3.1 Plug and Play

The **RB-1842** supports three types of Internet connection method: 3G/3.5G modem card, wire or wireless connection via xDSL/Cable modem. Just connect the 3G/3.5G modem card or Ethernet cable to **RB-1842**, the router will recognize it automatically.


3.1.1 SmartPhone /iPhone Internet sharing plug and play

With **RB-1842**, you can build an instant 802.11n wireless broadband sharing environment with your iPhone, Windows Mobile or Google smartphone. During the time you can still answer calls, send SMS and charge your phone.

Step 1. Connect iPhone/Smartphone with
RB-1842 via USB cable.



Step 2. Select “USB Tethering” as connection type.

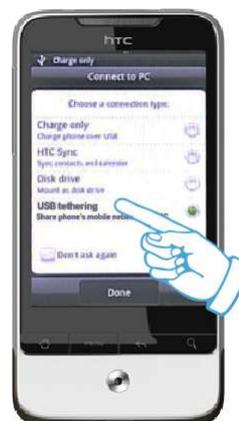

Step 3. Click on “Done”.



Step 4. Wait few seconds for pairing. When WAN LED on, the Internet is ready to access.



Note: 1. SmartPhone /iPhone Internet sharing is only effective under Router Mode.
2. For iPhone, Windows Mobile users, please check the settings before connecting to router:
(1) iPhone: turn off “WiFi”, “Bluetooth” function; select “Never” for Auto-Lock, and then turn on “Enable 3G” and “Internet Tethering”.
(2) Window Mobile: enable “USB to PC” function.

3.2 Router Mode- Using as a broadband router

1. Open a Web browser, and enter <http://192.168.1.1> (Default Gateway) into the blank.




2. Enter the User name and Password in to the blank and then Click **Login**. The default values for User Name and Password are **admin** (all in lowercase letters).



3.2.1 WAN Interface- Ethernet Port

The WAN access type is depended on the service that you contract with the provider. The **RB-1842** provides five selections for the WAN access type, **Static IP, DHCP Client, PPPoE, PPTP, L2TP**. Check with your ISP if you don't know the WAN type.

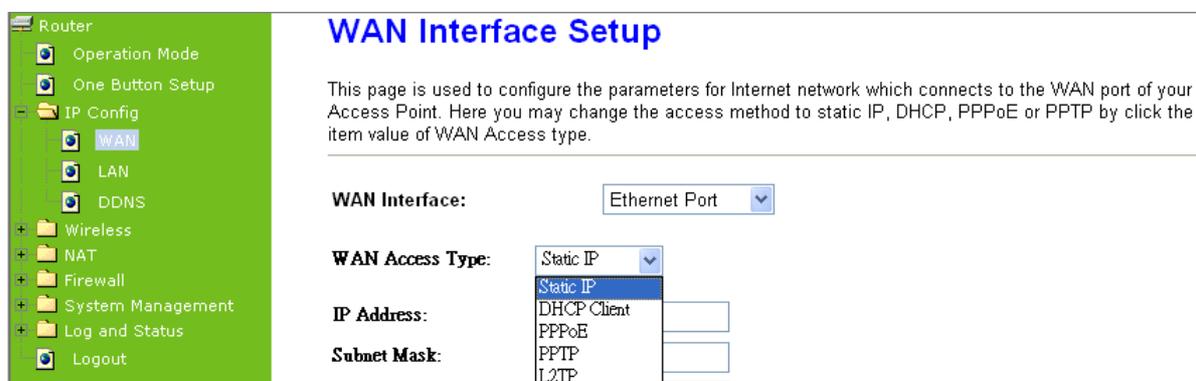

3.2.1.1 Static IP

Select **WAN** under the **IP Config** menu, and choose Ethernet Port for the WAN Interface. Its associated setting will show up.

Router

- Operation Mode
- One Button Setup
- IP Config
 - WAN**
 - LAN
 - DDNS
- Wireless
- NAT
- Firewall
- System Management
- Log and Status
- Logout

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Interface: Ethernet Port

WAN Access Type: Static IP

IP Address: 172.1.1.1

Subnet Mask: 255.255.255.0

Default Gateway: 172.1.1.254

MTU Size: 1500 (1400-1500 bytes)

DNS 1:

DNS 2:

DNS 3:

3.5G Backup: Backup of connection, check connection in every 3 minutes.

Service: UMTS/HSPA/HSDPA/HSUPA

Connect Speed: Auto Switch 2.5G/2.75G only 3G/3.5G only

SIM PIN: None

Retype SIM PIN:

APN: internet

User Name:

Password:

PHONE Number: *99#

Clone MAC Address: 000000000000

Enable IGMP Proxy

Enable Ping Access on WAN

Enable Web Server Access on WAN

Item	Description
WAN Access Type	Select "Static IP"
IP Address	Enter the IP address which is provided by your ISP.
Subnet Mask	Please enter the Subnet Mask address
Default Gateway	Input ISP Default Gateway Address, .
DNS	Input DNS information which is provided by your ISP
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter

	the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

3.2.1.2 DHCP Client

Router

- [Operation Mode](#)
- [One Button Setup](#)
- [IP Config](#)
 - WAN
 - LAN
 - DDNS
- [Wireless](#)
- [NAT](#)
- [Firewall](#)
- [System Management](#)
- [Log and Status](#)
- [Logout](#)

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Interface: Ethernet Port

WAN Access Type: DHCP Client

Host Name: default

MTU Size: 1492 (1400-1492 bytes)

Attain DNS Automatically

Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

3.5G Backup: Backup of connection, check connection in every 3 minutes.

Service: UMTS/HSPA/HSDPA/HSUPA

Connect Speed: Auto Switch 2.5G/2.75G only 3G/3.5G only

SIM PIN: None

Retype SIM PIN:

APN: internet

User Name:

Password:

PHONE Number: *99#

Clone MAC Address: 000000000000

Enable IGMP Proxy

Enable Ping Access on WAN

Enable Web Server Access on WAN

Apply Change
Reset

Item	Description
WAN Access Type	Select "DHCP Client"
Host Name	You can keep the default as the host name, or input a specific name if required by your ISP.

DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

3.2.1.3 PPPoE

Router

- Operation Mode
- One Button Setup
- IP Config
 - WAN
 - LAN
 - DDNS
- Wireless
- NAT
- Firewall
- System Management
- Log and Status
- Logout

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Interface: Ethernet Port

WAN Access Type: PPPoE

User Name:

Password:

Service Name:

Connection Type: Continuous Connect Disconnect

Idle Time: (1-1000 minutes)

MTU Size: (1360-1492 bytes)

Attain DNS Automatically

Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

3.5G Backup: Backup of connection, check connection in every minutes.

Service: UMTS/HSPA/HSDPA/HSUPA

Connect Speed: Auto Switch 2.5G/2.75G only 3G/3.5G only

SIM PIN: None

Retype SIM PIN:

APN:

User Name:

Password:

PHONE Number:

Clone MAC Address:

Enable IGMP Proxy

Enable Ping Access on WAN

Enable Web Server Access on WAN

Apply Change Reset

Item	Description
WAN Access Type	Select "PPPoE"
User Name	Input your user name provided by your ISP. If you don't know, please check with your ISP.

Password	Input the password provided by your ISP.
Service Name	Input the service name provided by your ISP.
Connection Type	Three types for select: Continues , Connect on Demand , and Manual .
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

3.2.1.4 PPTP

Router

- Operation Mode
- One Button Setup
- IP Config
 - WAN
 - LAN
 - DDNS
- Wireless
- NAT
- Firewall
- System Management
- Log and Status
- Logout

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Interface: Ethernet Port

WAN Access Type: PPTP

Address Mode: Dynamic Static

Server IP Address:

User Name:

Password:

MTU Size: (1400-1460 bytes)

Attain DNS Automatically

Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

3.5G Backup: Backup of connection, check connection in every minutes.

Service: UMTS/HSPA/HSDPA/HSUPA

Connect Speed: Auto Switch 2.5G/2.75G only 3G/3.5G only

SIM PIN: None

Retype SIM PIN:

APN:

User Name:

Password:

PHONE Number:

Clone MAC Address:

Enable IGMP Proxy

Enable Ping Access on WAN

Enable Web Server Access on WAN

Item	Description
WAN Access Type	Select " PPTP "
Server IP Address	Input your server IP address provided by your ISP. If you don't know, please check with your ISP.
User Name	Input PPTP account provided by your ISP.
Password	Input the password provided by your ISP.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

3.2.1.5 L2TP

Router

- Operation Mode
- One Button Setup
- IP Config
 - WAN
 - LAN
 - DDNS
- Wireless
- NAT
- Firewall
- System Management
- Log and Status
- Logout

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Interface: Ethernet Port

WAN Access Type: L2TP

Address Mode: Dynamic Static

Server IP Address/Host Name:

User Name:

Password:

MTU Size: 1460 (1400-1460 bytes)

Attain DNS Automatically

Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

3.5G Backup: Backup of connection, check connection in every 3 minutes.

Service: UMTS/HSPA/HSDPA/HSUPA

Connect Speed: Auto Switch 2.5G/2.75G only 3G/3.5G only

SIM PIN: None

Retype SIM PIN:

APN: internet

User Name:

Password:

PHONE Number: *99#

Clone MAC Address: 000000000000

Enable IGMP Proxy

Enable Ping Access on WAN

Enable Web Server Access on WAN

Apply Change
Reset

Item	Description
WAN Access Type	Select " PPTP "
Server IP Address / Host Name	Input your server IP address or Host Name provided by your ISP. If you don't know, please check with your ISP.
User Name	Input PPTP account provided by your ISP.
Password	Input the password provided by your ISP.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

3.2.2 WAN Interface- 3.5G USB dongle

Select **WAN** under the **IP Config** menu, and choose 3.5G usb dongle for the WAN Interface. Its associated setting will show as below.

Item	Description
APN (Access Point Name)	Enter the access point name. If you do not know the setting information for APN, check with your 3.5G service provider.
User Name	Enter the User Name supplied by the provider.
Password	Enter the password supplied by the provider.
Phone Number	Enter the subscribing access point's phone number.
Always / Dial on demand	If your 3G USB adapter is a pay-as-you-go plan base, select "Dial on demand" and disconnect the connection when you don't use the internet.
Apply Change	Click " Finish " to complete the setting

Rebooting this product is started. Please wait for a while.

Router Operation Mode One Button Setup	<h3 style="margin: 0;">Change setting successfully!</h3> <p style="margin: 5px 0;">System is configuring, after 21 seconds....</p>
--	--

3.2.3 WAN Interface- Wireless

Select WAN under the IP Config menu, and choose wireless for the WAN Interface. Its associated setting will show as below.

Router
 Operation Mode
 One Button Setup
 IP Config
 WAN
 LAN
 DDNS
 Wireless
 NAT
 Firewall
 System Management
 Log and Status
 Logout

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Interface: Wireless

SSID	BSSID	Channel	Type	Encrypt	Signal	Select
SAPIDO_2F_Wlan	00:d0:41:b5:10:6b	1 (B+G)	AP	WEP	56	<input type="radio"/>
BT_Storage_Server	00:d0:41:ab:f2:86	6 (B+G)	AP	no	44	<input type="radio"/>
SAPIDO_Mobile_Hotspot_bc6b63	00:d0:41:bc:6b:62	11 (B+G+N)	AP	no	26	<input type="radio"/>

Encryption: None Refresh

WAN Access Type: DHCP Client

Host Name: default

MTU Size: 1492 (1400-1492 bytes)

Attain DNS Automatically

Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address: 000000000000

Enable IGMP Proxy

Enable Ping Access on WAN

Enable Web Server Access on WAN


Apply Change
Reset

Item	Description
Refresh	You can see a list of available Wireless networks. Select the preferred one.
Encryption type	Select the Encryption type form the drop-down list.
WAN Access Type	Select Static IP, DHCP, PPPoE, PPTP or L2TP.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.

Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.


3.3 AP Mode-Using as a Access Point

Make sure to shift the mode into AP Mode.

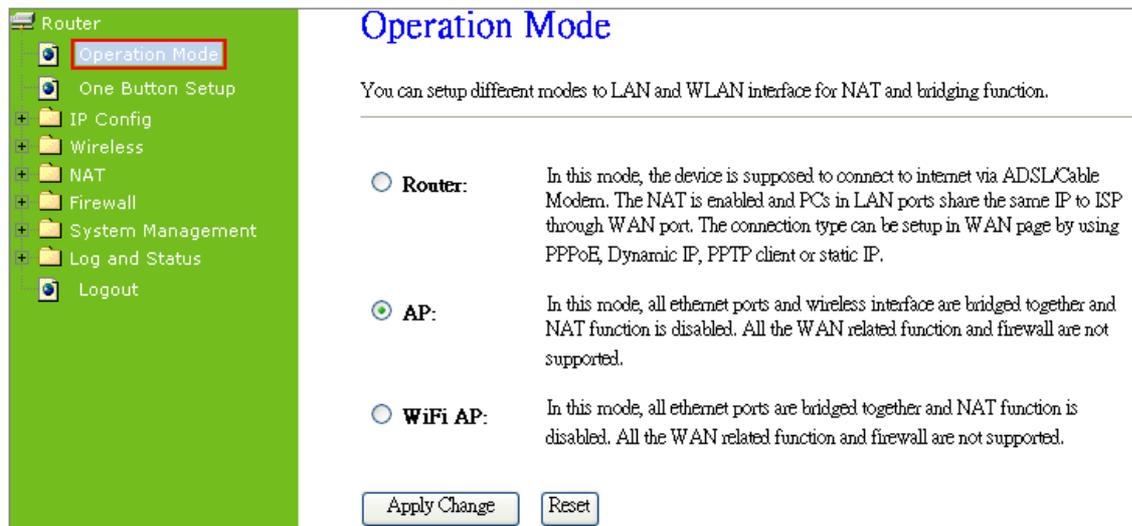

When this product is used as an access point, the IP address has to be changed. The default IP under AP mode is 192.168.1.254.

1. Open a Web browser, and enter <http://192.168.1.254> (Default Gateway) into the blank.



2. Enter the User name and Password in to the blank and then Click **Login**. The default values for User Name and Password are **admin** (all in lowercase letters).



Select **LAN** under the **IP Config** menu

Operation Mode

You can setup different modes to LAN and WLAN interface for NAT and bridging function.


- Router:** In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs in LAN ports share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPoE, Dynamic IP, PPTP client or static IP.
- AP:** In this mode, all ethernet ports and wireless interface are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.
- WiFi AP:** In this mode, all ethernet ports are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.

Apply Change Reset

Item	Description
IP Address	The default IP address is 192.168.1.254
Subnet Mask	Enter the Subnet Mask address
Default Gateway	Enter the Default Gateway address for LAN interfaces
DHCP	Select DHCP type: Client , Disable , or Server under different environment.
DHCP Client Range	When enable DHCP server, you can fill in the start and end IP address; client will be assigned an IP address from the range.
Static DHCP	When enable DHCP server, you can set static DHCP to a network device with specified MAC address
Device Name	Input a name for this router.
802.1d Spanning Tree	Disable or Enable the 802.1d Spanning Tree Protocol (STP)
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

3.4 WiFi AP Mode- Using as a Network Converter

Make sure to shift the mode into WiFi AP Mode.

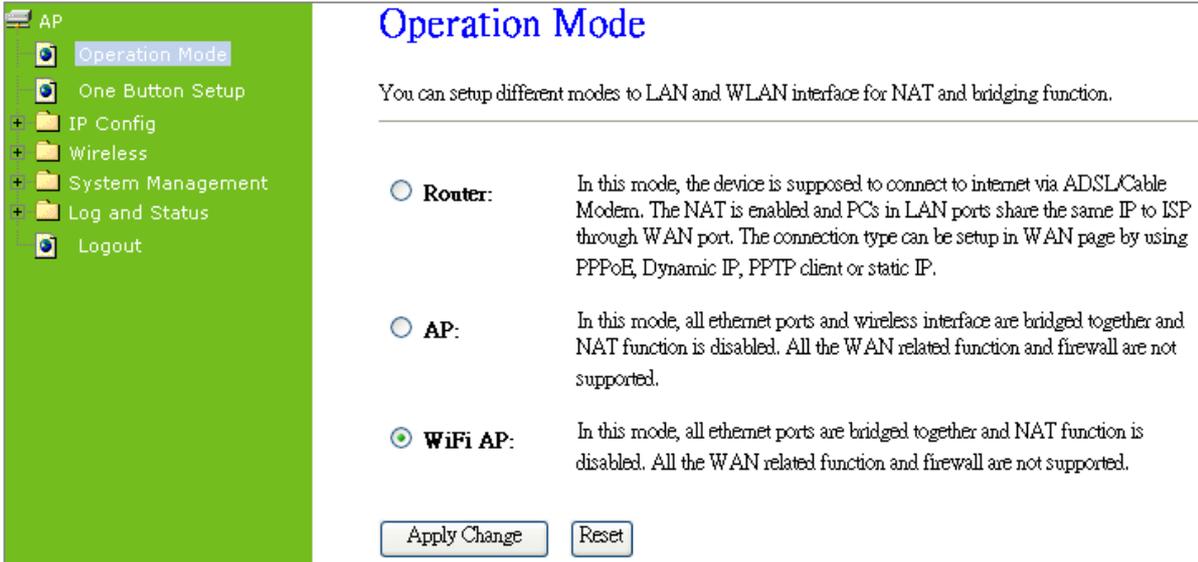

The screenshot shows the 'Operation Mode' configuration page. On the left is a green sidebar with a menu: AP, Operation Mode (selected), One Button Setup, IP Config, Wireless, System Management, Log and Status, and Logout. The main content area is titled 'Operation Mode' and contains the text: 'You can setup different modes to LAN and WLAN interface for NAT and bridging function.' Below this are three radio button options: 'Router' (unselected), 'AP' (unselected), and 'WiFi AP' (selected). Each option has a descriptive paragraph. At the bottom are 'Apply Change' and 'Reset' buttons.

Operation Mode

You can setup different modes to LAN and WLAN interface for NAT and bridging function.

- Router:** In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs in LAN ports share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPoE, Dynamic IP, PPTP client or static IP.
- AP:** In this mode, all ethernet ports and wireless interface are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.
- WiFi AP:** In this mode, all ethernet ports are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.

Apply Change Reset

The default gateway is <http://192.168.1.254> and for User Name and Password are **admin** (all in lowercase letters). Click **Login** to enter.



The screenshot shows the login page for the WiFi AP mode. It features an orange header with the text 'All Broadbands Green WiFi Router' and 'N+ Power Saving 3G/4G Broadband Router'. Below the header is a white box with the title 'WiFi AP'. Inside this box are two input fields: 'Username : admin' and 'Password : ●●●●●'. A 'Login' button is positioned below the password field.

All Broadbands Green WiFi Router
N+ Power Saving 3G/4G Broadband Router

WiFi AP

Username : admin

Password : ●●●●●

Login

WIFI AP

- Operation Mode
- One Button Setup
- IP Config
 - LAN
- + Wireless
- + System Management
- + Log and Status
- Logout

LAN Interface Setup

This page is used to configure the parameters for local area network which connects to the LAN port of your Access Point. Here you may change the setting for IP address, subnet mask, DHCP, etc..

IP Address:

Subnet Mask:

Default Gateway:

DHCP: Client ▼

DHCP Client Range: - Show Client

Static DHCP: Set Static DHCP

Device Name:

802.1d Spanning Tree: Disabled ▼

Clone MAC Address:

Apply Change
Reset

Item	Description
IP Address	The default IP address is 192.168.1.254
Subnet Mask	Enter the Subnet Mask address
Default Gateway	Enter the Default Gateway address for LAN interfaces
DHCP	Select DHCP type: Client , Disable under different environment.
DHCP Client Range	When enable DHCP server, you can fill in the start and end IP address; client will be assigned an IP address from the range.
Static DHCP	When enable DHCP server, you can set static DHCP to a network device with specified MAC address
Device Name	Input a name for this router.
802.1d Spanning Tree	Disable or Enable the 802.1d Spanning Tree Protocol (STP)
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

Chapter 4 Wireless Setup

4.1 Wireless Setup

There are two ways to setup wireless LAN with **RB-1842**. You can use either way to setup Wireless LAN.


4.1.1 Setup Wireless LAN by WPS button

You can setup wireless LAN easily by using the WPS button if both WLAN router and the WLAN adapter (client) are WPS supported. Before starting the setup, please check the things below:

- Get ready for Internet connection with **RB-1842**
- The WLAN adapter is finished installation and plug in your computer/ laptop.

There are two ways to setup a wireless LAN between RB-1842 and your wireless adapter:

1. Setup with WPS button, if your wireless adapter has a physical WPS button.
 - (1) Press the WPS button (A) from RB-1842 and wait for Wireless/WPS LED light (B) changed into orange.
 - (2) Press the WPS button (C) from the adapter until the setup window shows up.

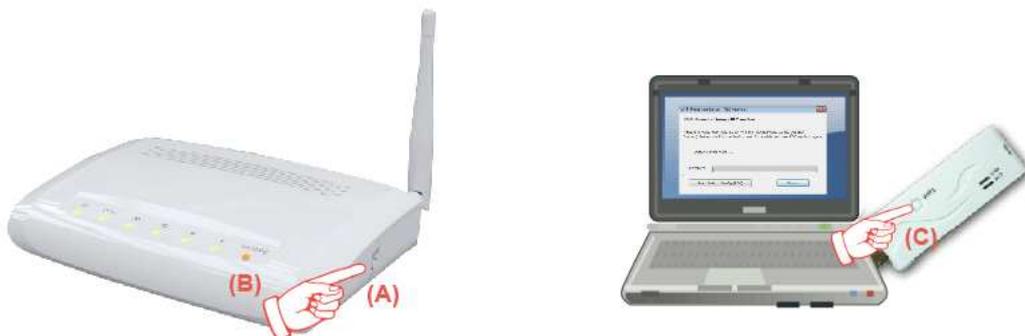

- (3) Open a web browser to check the internet connection.



- (4) Setup without WPS button if your wireless adapter has only virtual WPS function.


(5) Open Wireless adapter utility.



(6) Press the WPS button (A) from RB-1842 and wait for Wireless/WPS LED light (B) changed into orange.




(7) Back to the WLAN adapter utility and click its "PBC" (C) button.

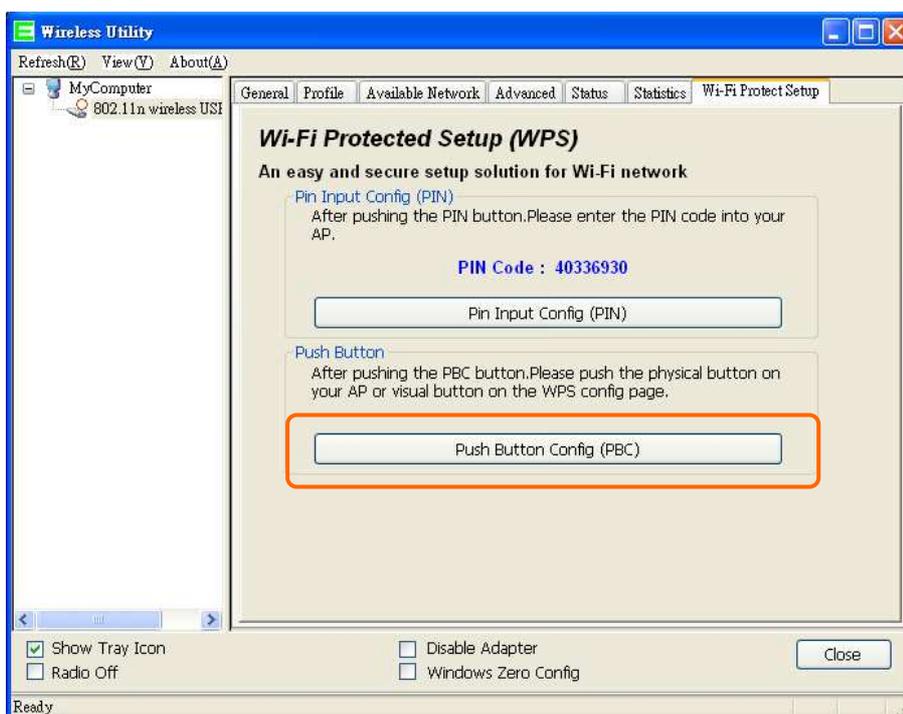

The utility will start searching the destination connection.

(8) Confirm the information form the Utility

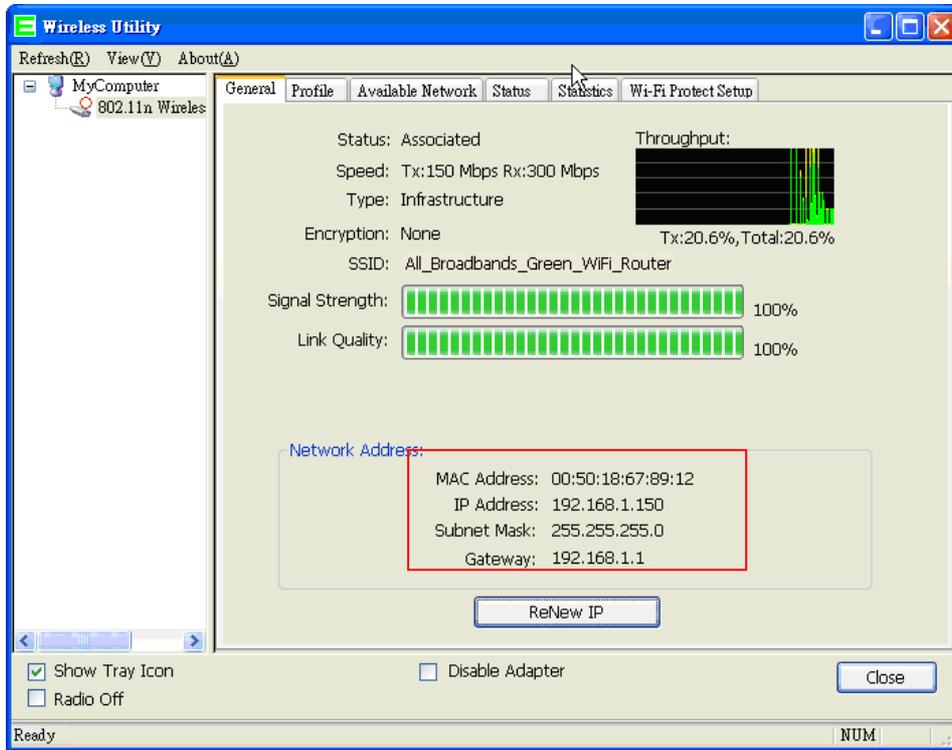

(9) After completes the WPS setup. Please confirm that it can be connected to the Internet.

Note: The setup image might be some differences when using other branded Adapter.

4.1.2 Wireless Basic Setup from Web GUI

The Wireless Basic Settings include Band, Mode, SSID, Channel Number and other wireless settings.



Wireless Basic Settings

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters.

Disable Wireless LAN Interface

Band: 2.4 GHz (B+G+N) ▼

Mode: AP ▼

Network Type: Infrastructure ▼

SSID: All_Broadbands_Green_WiFi_Router

Channel Width: 40MHz ▼

Control Sideband: Upper ▼

Channel Number: Auto ▼

Broadcast SSID: Enabled ▼

WMM: Enabled ▼

Data Rate: Auto ▼

Associated Clients:

Enable Mac Clone (Single Ethernet Client)

Enable Universal Repeater Mode (Acting as AP and client simultaneously)

SSID of Extended Interface: ESSID_SAPIDO_RB-1842

Item	Description
Disable Wireless LAN Interface	Turn off the wireless service.
Band	Select the frequency. It has 6 options: 2.4 GHz (B/G/N/B+G/G+N/B+G+N).
Mode	Select the mode. It has 3 modes to select: (AP, Client, WDS, AP+WDS). Multiple AP: Please check Section 4.1.2.1. * In Wi-Fi AP mode only support Client mode.
SSID	Service Set identifier, users can define to any or keep as default.
Channel Width	Please select the channel width, it has 2 options: 20MHZ, and 40MHZ.

Control Sideband	Enable this function will control your router use lower or upper channel.
Channel Number	Please select the channel; it has Auto, 1, 2~11 or 13 options.
Broadband SSID	User may choose to enable Broadcast SSID or not.
Data Rate	Please select the data transmission rate.
Associate Clients	Check the AP connectors and the Wireless connecting status.
Enable MAC Clone (Single Ethernet Client)	Clone the MAC address for ISP to identify.
Enable Universal Repeater Mode (Acting as AP and Client simultaneously)	Allow to equip with the wireless way conjunction upper level, provide the bottom layer user link in wireless and wired way in the meantime. (The IP that bottom layer obtains is from upper level.) Please also check Section 4.1.2.2
SSID of Extended Interface	While linking the upper level device in wireless way, you can set SSID to give the bottom layer user search.
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

* Under WiFi AP Mode, there are 2 options of Network type: Infrastructure or Ad hoc. Select Infrastructure if connecting to a wireless router or access point. Select Ad hoc if connecting directly to another wireless adapter.

4.1.2.1 Multiple APs

The **RB-1842** can register up to 4 SSIDs (wireless LAN group). It can be used as if there are multiple wireless LAN access points with one product. Each SSID could be set with different data rate, WMM and access type.

Multiple APs

This page shows and updates the wireless setting for multiple APs.

No.	Enable	Band	SSID	Data Rate	Broadcast SSID	WMM	Access	Active Client List
AP1	<input checked="" type="checkbox"/>	2.4 GHz (B+G+N) ▼	Multiple_AP1	Auto ▼	Enabled ▼	Enabled ▼	LAN+WAN ▼	Show
AP2	<input checked="" type="checkbox"/>	2.4 GHz (B+G+N) ▼	Multiple_AP2	Auto ▼	Enabled ▼	Enabled ▼	LAN+WAN ▼	Show
AP3	<input checked="" type="checkbox"/>	2.4 GHz (B+G+N) ▼	Multiple_AP3	Auto ▼	Enabled ▼	Enabled ▼	LAN+WAN ▼	Show
AP4	<input checked="" type="checkbox"/>	2.4 GHz (B+G+N) ▼	Multiple_AP4	Auto ▼	Enabled ▼	Enabled ▼	LAN+WAN ▼	Show

Item	Description
Enable	Enable or disable the service.
Band	Select the frequency.
SSID	Enter the SSID
Data Rate	Select the data transmission rate.
Access	Enable this function can let clients use two access types: a. LAN+WAN: the client can access to the Internet and access in the router's GUI. b. WAN: the client can only access to the Internet.
Active Client List	Display the properties of the client which is connecting successfully.
Apply Change & Reset	Click on Apply Change to save the setting date, or you may click on Reset to clear all the input data.

4.1.2.2 Enable Universal Repeater Mode

The router can act as Station and AP at the same time. It can use Station function to connect to a Root AP and use AP function to service all wireless stations within its coverage.



Example: When users enable the Universal Repeater to connect to the upper level device, please fill in the upper level device's channel and SSID. Click on Apply Changes to save the settings.

(Please disable the DHCP service first)

Channel Number:

Broadcast SSID:

WMM:

Data Rate:

Associated Clients:

Enable Mac Clone (Single Ethernet Client)

Enable Universal Repeater Mode (Acting as AP and client simultaneously)

SSID of Extended Interface:

Users can use the Network Configuration page to check the information about “Wireless Repeater Interface Configuration”.


Network Config

This page shows the current status and some basic settings of the device.

System	
Uptime	0day:0h:9m:6s
Firmware Version	Ver1.0.4
WirelessConfiguration	
Mode	AP
Band	2.4 GHz (B+G+N)
SSID	All_Broadbands_Green_WiFi_Router
Channel Number	1
Encryption	Disabled
MAC Address	00:e0:4c:81:88:88
Associated Clients	1
WirelessRepeater Interface Configuration	
Mode	Infrastructure Client
ESSID	ESSID_SAPIDO_RB-1842
Encryption	Disabled
MAC Address	00:00:00:00:00:00
State	Scanning
LAN Configuration	
Attain IP Protocol	Fixed IP

4.2 Wireless Security Setup


Here users define the security type and level of the wireless network. Selecting different methods provides different levels of security. **Please note that using any encryption may cause a significant degradation of data throughput on the wireless link.** There are five Encryption types supported: “None”, “WEP”, “WPA (TKIP)”, “WPA2(AES)”, and “WPA2 Mixed”. Enabling WEP can protect your data from eavesdroppers. If you do not need this feature, select “None” to skip the following setting.

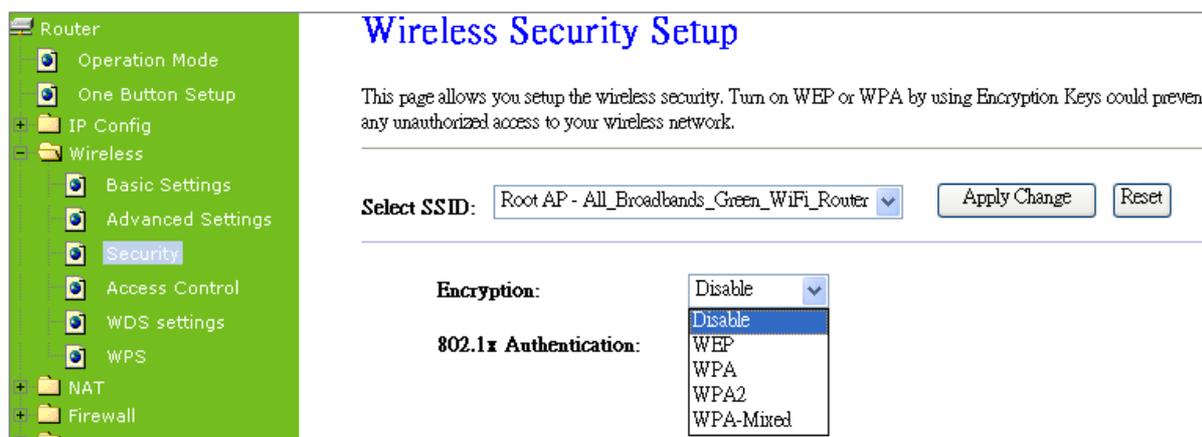

The screenshot shows the 'Wireless Security Setup' page. On the left is a green sidebar with a navigation menu: Router, Operation Mode, One Button Setup, IP Config, Wireless (expanded), Basic Settings, Advanced Settings, Security (highlighted), Access Control, WDS settings, WPS, NAT, Firewall, and Custom Management. The main content area has the title 'Wireless Security Setup' and a description: 'This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.' Below this is a 'Select SSID:' dropdown menu showing 'Root AP - All_Broadbands_Green_WiFi_Router' and 'Apply Change' and 'Reset' buttons. The 'Encryption:' dropdown menu is open, showing options: Disable (selected), WEP, WPA, WPA2, and WPA-Mixed. The '802.1x Authentication:' checkbox is unchecked.

1. Encryption- WEP Key

- (1) Set WEP Key: This section provides 64bit and 128bit WEP encryptions and two different shared key formats (ASCII and Hex) for wireless network.

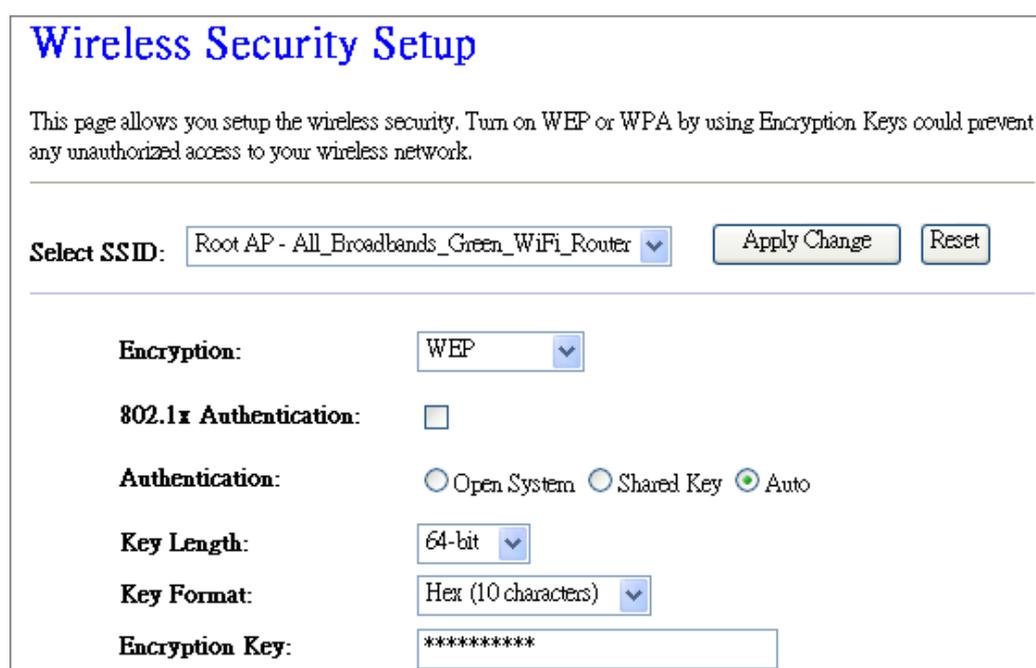

The screenshot shows the 'Wireless Security Setup' page with 'WEP' selected in the 'Encryption:' dropdown menu. The '802.1x Authentication:' checkbox is unchecked. Under 'Authentication:', the 'Auto' radio button is selected. The 'Key Length:' dropdown menu shows '64-bit'. The 'Key Format:' dropdown menu shows 'Hex (10 characters)'. The 'Encryption Key:' text box contains ten asterisks (*****).

(2) 802.1x Authentication

It is a safety system by using authentication to protect your wireless network.

2. Encryption- WPA (WPA, WPA2, and WPA2 Mixed), WPA Authentication Mode

(1) Enterprise (RADIUS): Please fill in the RADIUS server Port, IP Address, and Password

Wireless Security Setup

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Select SSID:

Encryption:

Authentication Mode: Enterprise (RADIUS) Personal (Pre-Shared Key)

WPA Cipher Suite: TKIP AES

RADIUS Server IP Address:

RADIUS Server Port:

RADIUS Server Password:

(2) Personal (Pre-Shared Key): Pre-Shared Key type is ASCII Code; the length is between 8 to 63 characters. If the key type is Hex, the key length is 64 characters.

Wireless Security Setup

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Select SSID:

Encryption:

Authentication Mode: Enterprise (RADIUS) Personal (Pre-Shared Key)

WPA Cipher Suite: TKIP AES

WPA2 Cipher Suite: TKIP AES

Pre-Shared Key Format:

Pre-Shared Key:

(3) Apply Change & Reset: Click on 'Apply Changes' to save setting data. Or click 'Reset' to reset all the input data.

4.3 Wireless Access Control

Access Control allows user to block or allow wireless clients to access this router. Users can select the access control mode, then add a new MAC address with a simple comment and click on “Apply Change” to save the new addition. To delete a MAC address, select its corresponding checkbox under the Select column and click on “Delete Selected” button.

Wireless Access Control

If you choose 'Allowed Listed', only those clients whose wireless MAC addresses are in the access control list will be able to connect to your Access Point. When 'Deny Listed' is selected, these wireless clients on the list will not be able to connect the Access Point.

Wireless Access Control Mode:

MAC Address: **Comment:**

Current Access Control List:

MAC Address	Comment	Select

Take the wireless card as the example.

(1) Please select Deny Listed in Wireless Access Control Mode first, and then fill in the MAC address what you plan to block in the MAC Address field. Click Apply Changes to save the setting.

Wireless Access Control

If you choose 'Allowed Listed', only those clients whose wireless MAC addresses are in the access control list will be able to connect to your Access Point. When 'Deny Listed' is selected, these wireless clients on the list will not be able to connect the Access Point.

Wireless Access Control Mode: Deny Listed
MAC Address: **Comment:**

Current Access Control List:

MAC Address	Comment	Select
		<input type="button" value="Delete Selected"/> <input type="button" value="Delete All"/> <input type="button" value="Reset"/>

(2) The MAC address what you set will be displayed on the Current Access Control List.

Wireless Access Control


If you choose 'Allowed Listed', only those clients whose wireless MAC addresses are in the access control list will be able to connect to your Access Point. When 'Deny Listed' is selected, these wireless clients on the list will not be able to connect the Access Point.

Wireless Access Control Mode: Deny Listed
MAC Address: **Comment:**

Current Access Control List:

MAC Address	Comment	Select
00:18:f8:63:8a:54		<input type="checkbox"/>

(3) The wireless client will be denied by the wireless router.

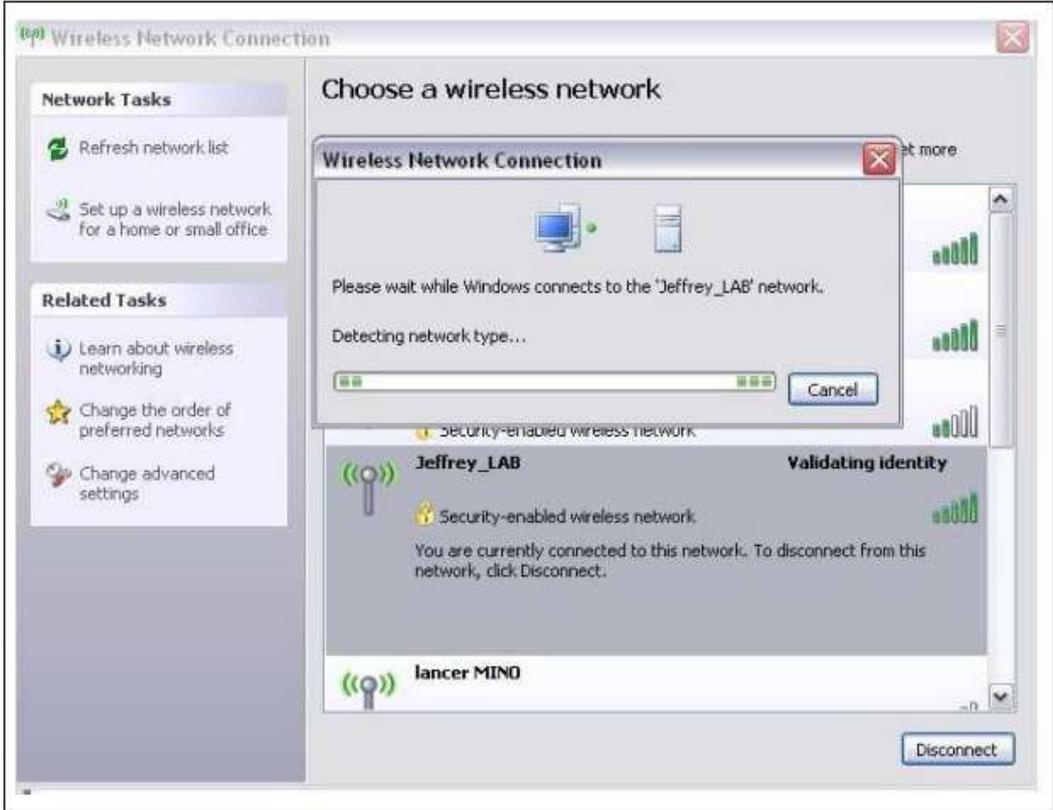

Chapter 5 Router Mode Security Setup

This section contains configurations for the RB-1842's advanced functions such as: virtual server, DMZ, and Firewall to provide your network under a security environment.

5.1 NAT

5.1.1 Virtual Server

The Virtual Server feature allows users to create Virtual Servers by re-directing a particular range of service port numbers (from the WAN port) to a particular LAN IP address.

Port Forwarding

Entries in this table allow you to automatically redirect common network services to a specific machine behind the NAT firewall. These settings are only necessary if you wish to host some sort of server like a web server or mail server on the private local network behind your Gateway's NAT firewall.

Enable Port Forwarding

Address: Protocol: Both Public Port Range: - Comment:

Current Port Forwarding Table:


Local IP Address	Protocol	Port Range	Comment	Select
<input type="button" value="Delete Selected"/> <input type="button" value="Delete All"/> <input type="button" value="Reset"/>				

Item	Description
Enable Port Forwarding	Select to enable Port Forwarding service or not.
Address	Specify the IP address which receives the incoming packets.
Protocol	Select the protocol type.
Public Port Range	Enter the port number, for example 80-80.
Private Port Range	Enter the port number, for example 20-22.
Comment	Add comments for this port forwarding rule.
Add	Click on Add to enable the settings.
Current Port Forwarding Table	It will display all port forwarding regulation you made.

Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.
Reset	Click Reset to cancel.

Please find the following figure to know that what the virtual server is. The web server is located on 192.168.1.100, forwarding port is 80, and type is TCP+UDP.

Configuration:

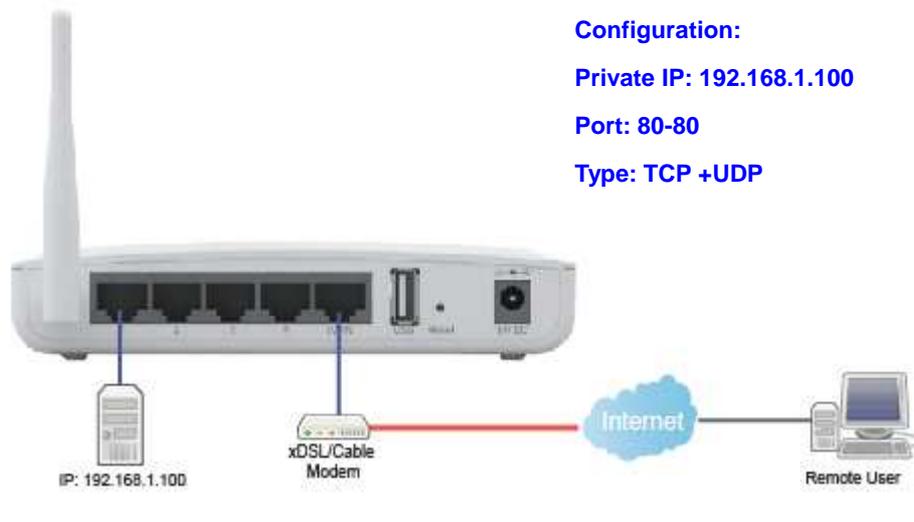

5.1.2 Virtual DMZ

The DMZ feature allows one local user to be exposed to the Internet for special-purpose applications like Internet gaming or videoconferencing. When enabled, this feature opens all ports to a single station and hence renders that system exposed to intrusion from outside. The port forwarding feature is more secure because it only opens the ports required by that application.

DMZ

A Demilitarized Zone is used to provide Internet services without sacrificing unauthorized access to its local private network. Typically, the DMZ host contains devices accessible to Internet traffic, such as Web (HTTP) servers, FTP servers, SMTP (e-mail) servers and DNS servers.

Enable DMZ

DMZ Host IP Address:

Item	Description
Enable DMZ	It will enable the DMZ service if you select it.
DMZ Host IP Address	Please enter the specific IP address for DMZ host.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.

5.2 Firewall



5.2.1 QoS

The QoS can let you classify Internet application traffic by source/destination IP address and port number.

To assign priority for each type of application and reserve bandwidth can let you have a better experience in using critical real time services like Internet phone, video conference ...etc.

QoS

Entries in this table improve your online gaming experience by ensuring that your game traffic is prioritized over other network traffic, such as FTP or Web.

Enable QoS

Automatic Uplink Speed

Manual Uplink Speed (Kbps):

Automatic Downlink Speed

Manual Downlink Speed (Kbps):

QoS Rule Advanced Settings:

Address Type: IP MAC

Local IP Address: -

MAC Address:

Mode:

Uplink Bandwidth (Kbps):

Downlink Bandwidth (Kbps):

Comment:

Current QoS Rules Table:

Local IP Address	MAC Address	Mode	Uplink Bandwidth (Kbps)	Downlink Bandwidth (Kbps)	Comment	Select

Item	Description
Enable QoS	Check "Enable QoS" to enable QoS function for the WAN port. You also can uncheck "Enable QoS" to disable QoS function for the WAN port.
Automatic uplink speed / Manual Uplink Speed	Set the uplink speed by manual to assign the download or upload bandwidth by the unit of Kbps or check the Automatic uplink speed.
QoS setting selection	Select Simple Settings or Advanced .
QoS Rule Simple Setting:	
Application selection	Select HTTP , FTP or Custom . You can set up port range and

	protocol type by select Custom .
Priority	Highest, High, Normal or Low
Comment	Write your comment here.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.

QoS Rule Advanced Settings:

Address Type: IP MAC

Local IP Address: -

MAC Address:

Mode: ▾

Uplink Bandwidth (Kbps):

Downlink Bandwidth (Kbps):

Comment:

Current QoS Rules Table:

Local IP Address	MAC Address	Mode	Uplink Bandwidth (Kbps)	Downlink Bandwidth (Kbps)	Comment	Select
------------------	-------------	------	-------------------------	---------------------------	---------	--------

QoS Rule Advance Setting:	
Address Type	Set QoS by IP Address or MAC address
Mode	Select Guaranteed minimum bandwidth or Restricted maximum bandwidth
Bandwidth	Key in the bandwidth.
Comment	Write your comment here.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.

5.2.2 Port Filtering

When enabled packets are denied access to Internet/filtered based on their port address.

Port Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Enable Port Filtering

Port Range: - Protocol: Comment:


Both
Both
TCP
UDP

Current Filter Table:

Port Range	Protocol	Comment	Select
------------	----------	---------	--------

Item	Description
Enable Port Filtering	Select Enable Port Filtering to filter ports.
Port Range	Enter the port number that needs to be filtered.
Protocol	Please select the protocol type of the port.
Comment	You can add comments for this regulation.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.
Current Filter Table	It will display all ports that are filtering now.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.
Reset	You can click Reset to cancel.

Port 80 has been blocked as the following illustrate.

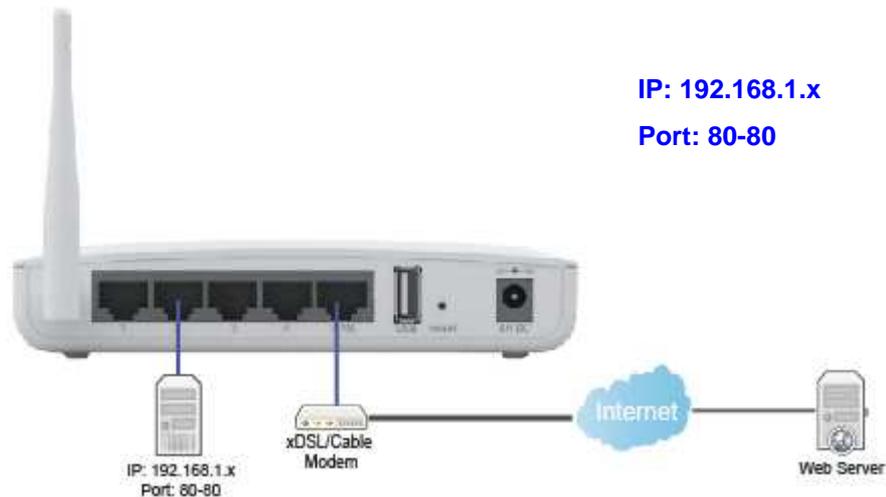

5.2.3 IP Filtering

When enabled, LAN clients are blocked / filtered from accessing the Internet based on their IP addresses.

IP Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Enable IP Filtering

Local IP Address: Protocol: Comment:

Current Filter Table:

Local IP Address	Protocol	Comment	Select
------------------	----------	---------	--------

Item	Description
Enable IP Filtering	Please select Enable IP Filtering to filter IP addresses.
Local IP Address	Please enter the IP address that needs to be filtered.
Protocol	Please select the protocol type of the IP address
Comment	You can add comments for this regulation.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.

Current Filter Table	It will display all ports that are filtering now.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.
Reset	You can click Reset to cancel.

5.2.4 MAC Filtering

When enabled, filtering will be based on the MAC address of LAN computers. Any computer with its MAC address on this list will be blocked from accessing the Internet.

MAC Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Enable MAC Filtering

MAC Address: **Comment:**

Current Filter Table:

MAC Address	Comment	Select

Item	Description
Enable MAC Filtering	Please select Enable MAC Filtering to filter MAC addresses.
MAC Address	Please enter the MAC address that needs to be filtered.
Comment	You can add comments for this regulation.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.
Current Filter Table	It will display all ports that are filtering now.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.
Reset	You can click Reset to cancel.

5.2.5 URL Filtering

URL Filtering is used to restrict users to access specific websites in internet

URL Filtering

URL filter is used to deny LAN users from accessing the internet. Block those URLs which contain keywords listed below.

Enable URL Filtering

URL Address:

Current Filter Table:

URL Address	Select
-------------	--------

Item	Description
Enable URL Filtering	Please select Enable MAC Filtering to filter MAC addresses
URL Address	Please enter the MAC address that needs to be filtered.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.
Current Filter Table	It will display all ports that are filtering now.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.
Reset	You can click Reset to cancel.

Notes: This function will not be in effect when the Virtual Server is enabled. Please disable Virtual Server before activate the URL Filtering function.

Chapter 6 Advanced Setup

You can find advanced settings in this section.

Router Router Mode only.

AP AP Mode only.

WiFi-AP WiFi AP Mode only.

6.1 Dynamic DNS Setting **Router**

You can assign a fixed host and domain name to a dynamic Internet IP address. Each time the router boots up, it will re-register its domain-name-to-IP-address mapping with the DDNS service provider. This is the way Internet users can access the router through a domain name instead of its IP address.

Note: make sure that you have registered with a DDNS service provider before enabling this feature.

The screenshot shows the 'Dynamic DNS Setting' page. On the left is a green sidebar with a navigation menu: Router, Operation Mode, One Button Setup, IP Config (expanded), WAN, LAN, DDNS (selected), Wireless, NAT, Firewall, System Management, Log and Status, and Logout. The main content area has the title 'Dynamic DNS Setting' and a description: 'Dynamic DNS is a service, that provides you with a valid, unchanged, internet domain name (an URL) to go with that (possibly often changing) IP address.' Below this is a checkbox for 'Enable DDNS'. There are four input fields: 'Service Provider' (a dropdown menu showing '0' and 'dyn dns'), 'Domain Name' (text input with 'host.dyn dns.org'), 'User Name/Email' (text input), and 'Password/Key' (text input). At the bottom, there are 'Apply Change' and 'Reset' buttons. A note at the bottom reads: 'Note: For TZO, you can have a 30 days free trial [here](#) or manage your TZO account in [control panel](#). For DynDNS, you can create your DynDNS account [here](#)'.

Please enter Domain Name, User Name/Email, and Password/Key. After entering, click on Apply Changes to save the setting, or you may click on Reset to clear all the input data.

Item	Description
Enable/Disable DDNS	Select enable to use DDNS function. Each time your IP address to WAN is changed, and the information will be updated to DDNS service provider automatically.
Service Provider	Choose correct Service Provider from drop-down list, here including DynDNS, TZO, ChangeIP, Eurodns, OVH, NO-IP, ODS, Regfish

	embedded in RB-1842.
User Name/Email	User name is used as an identity to login Dynamic-DNS service.
Password/Key	Password is applied to login Dynamic-DNS service.
Apply & Cancel	Click on Apply button to continue. Click on Cancel button to clear the setting on this page.

6.2 Wireless Advanced Setup



In Advanced Settings page, more 802.11 related parameters are tunable

Wireless Advanced Settings

These settings are only for more technically advanced users who have a sufficient knowledge about wireless LAN. These settings should not be changed unless you know what effect the changes will have on your Access Point.

Fragment Threshold: (256-2346)

RTS Threshold: (0-2347)

Beacon Interval: (20-1024 ms)

Preamble Type: Long Preamble Short Preamble

IAPP: Enabled Disabled

Protection: Enabled Disabled

Aggregation: Enabled Disabled

Short GI: Enabled Disabled

WLAN Partition: Enabled Disabled

STBC: Enabled Disabled

20/40MHz Coexist: Enabled Disabled

RF Output Power: 100% 70% 50% 35% 15%

Apply Change

Reset

Item	Description
Fragment Threshold	To identify the maxima length of packet, the over length packet will be fragmentized. The allowed range is 256-2346, and default length is 2346.
RTS Threshold	This value should remain at its default setting of 2347. The range is 0~2347. Should you encounter inconsistent data flow, only minor modifications are recommended. If a network packet is smaller than the present RTS threshold size, the RTS/CTS mechanism will not be enabled. The router sends Request to Send (RTS) frames to a particular receiving station and negotiates the sending of a data frame. After receiving an RTS, the wireless station responds with a Clear to Send (CTS) frame to acknowledge the right to begin transmission. Fill the range from 0 to 2347 into this blank.
Beacon Interval	Beacons are packets sent by an access point to synchronize a wireless network. Specify a beacon interval value. The allowed setting range is 20-1024 ms..
Preamble Type	PLCP is Physical layer convergence protocol and PPDU is PLCP protocol data unit during transmission, the PSDU shall be appended to a PLCP preamble and header to create the PPDU. It has 2 options: Long Preamble and Short Preamble.
IAPP	Inter-Access Point Protocol is a recommendation that describes an optional extension to IEEE 802.11 that provides wireless

	access-point communications among multivendor systems.
Protection	Please select to enable wireless protection or not.
Aggregation	Enable this function will combine several packets to one and transmit it. It can reduce the problem when mass packets are transmitting.
Short GI	Users can get better wireless transmission efficiency when they enable this function.
RF Output Power	Users can adjust RF output power to get the best wireless network environment. Users can choose from 100%, 70%, 50%, 35%, and 15%.
Apply Changes & Reset	Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.

6.2.1 Wireless Site Survey WiFi-AP

This function provides users to search existing wireless APs or wireless base stations from ISP. You can connect to a wireless AP manually in Wi-Fi AP mode. The designed AP will appear on SSID column in Wireless Basic Setup page.

Please click on Refresh to refresh the list. Click Connect after select an existing AP to connect.

Wireless Site Survey

This page provides tool to scan the wireless network. If any Access Point or IBSS is found, you could choose to connect it manually when client mode is enabled.


List of APs

SSID	BSSID	Channel	Type	Encrypt	Signal	Select
SAPIDO_2F_Wlan	00:d0:41:b5:10:6b	1 (B+G)	AP	WEP	50	<input type="radio"/>
BT_WebCam	00:14:85:d0:be:89	9 (B+G)	AP	WEP	30	<input type="radio"/>
SAPIDO_Mobile_Hotspot_bc6b63	00:d0:41:bc:6b:62	11 (B+G+N)	AP	no	28	<input type="radio"/>


6.2.2 WDS Settings Router AP

When selected in the Basic Settings page and enabled here, Wireless Distribution System (WDS) enables the router to be used as a wireless bridge. Two Wireless-N Routers in bridge mode can communicate with each other through their wireless interfaces. To accomplish this, all wireless routers should be set to the same channel and the MAC address of other AP / Routers should be entered in the table.

The WDS explanation is as the following picture.

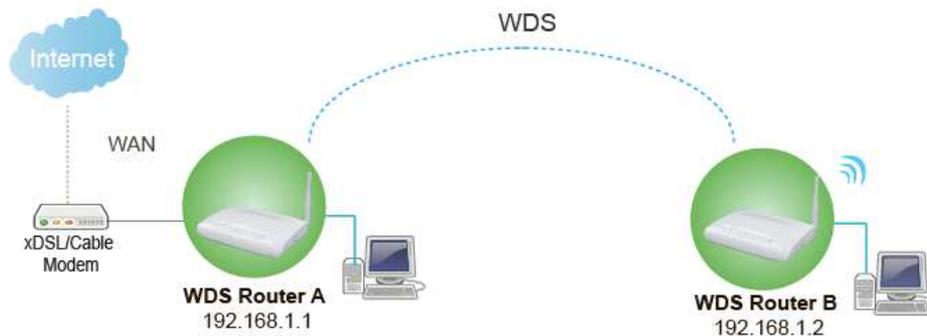

Setup Router A



1. Please check the MAC address and Channel number from WDS Router A.

WirelessConfiguration	
Mode	AP+WDS
Band	2.4 GHz (B+G+N)
SSID	All_Broadbands_Green_WIFI_Router
Channel Number	11
Encryption	Disabled(AP), Disabled(WDS)
MAC Address	00:e0:4c:81:88:88
Associated Clients	1
LAN Configuration	
Attain IP Protocol	Fixed IP
IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
DHCP Server	Enabled
MAC Address	00:e0:4c:81:88:88

2. Set the connection mode to "AP+WDS" from "Wireless Basic Setting", and then select the channel number (in this example is "6"). Click Apply Changes to save the setting.

Wireless Basic Settings

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters.

Disable Wireless LAN Interface

Band: 2.4 GHz (B+G+N) ▾

Mode: AP+WDS ▾

Network Type: Infrastructure ▾

SSID: All_Broadbands_Green_WiFi_Router

Channel Width: 40MHz ▾

Control Sideband: Upper ▾

Channel Number: Auto ▾

Broadcast SSID: Enabled ▾

WMM: Enabled ▾

Data Rate: Auto ▾

Associated Clients:

Enable Mac Clone (Single Ethernet Client)

Enable Universal Repeater Mode (Acting as AP and client simultaneously)

SSID of Extended Interface: ESSID_SAPIDO_RB-1842

3. Enable WDS function from the page – “WDS Setting”, and then fill in the MAC address of Router B. Click Apply Changes to save the setting data.

WDS Settings

Wireless Distribution System uses wireless media to communicate with other APs, like the Ethernet does. To do this, you must set these APs in the same channel and set MAC address of other APs which you want to communicate with in the table and then enable the WDS.

Enable WDS

MAC Address:

Data Rate:

Comment:

WDS Security Setup:

MAC Address	Tx Rate (Mbps)	Comment	Select
			<input type="checkbox"/>

4. The WDS AP List will show the WDS device MAC address after reboot.

WDS Settings

Wireless Distribution System uses wireless media to communicate with other APs, like the Ethernet does. To do this, you must set these APs in the same channel and set MAC address of other APs which you want to communicate with in the table and then enable the WDS.

Enable WDS

MAC Address:

Data Rate:

Comment:

WDS Security Setup:

MAC Address	Tx Rate (Mbps)	Comment	Select
00:0e:68:ff:05:c8	Auto		<input type="checkbox"/>

5. Move on the setup to WDS Router B



WDS Settings

Wireless Distribution System uses wireless media to communicate with other APs, like the Ethernet does. To do this, you must set these APs in the same channel and set MAC address of other APs which you want to communicate with in the table and then enable the WDS.

Enable WDS

MAC Address: → Input Router A's MAC address here.


Data Rate:

Comment:

WDS Security Setup:

MAC Address	Tx Rate (Mbps)	Comment	Select
-------------	----------------	---------	--------

6. You will receive an IP address from Router A.

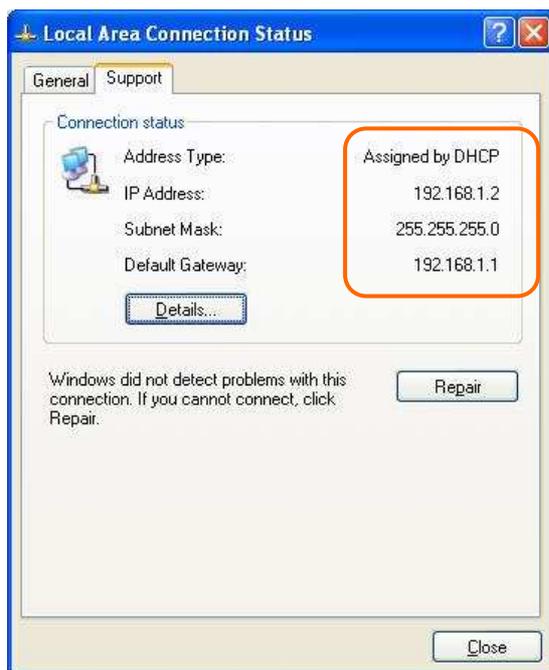

If you failed the WDS setting, please check you setting with refer to the list below.

	Router A	Router B
Mode	Router	AP
LAN IP Address	Set the same segment as the router B(Note 1) Example :192.168.1.1	Set the same segment as the router A(Note 1) Example :192.168.1.2
Security	Set the same security as Router B	Set the same security as Router A
DHCP	Enable	Disable
MAC Address	Same as Router B	Same as Router A

Note 1: LAN IP address should be under the same segment but cannot be the same number.

6.2.3 WPS Router AP

This page allows user to change the setting for WPS (Wi-Fi Protected Setup). Using this feature could let your wireless client atomically synchronize it's setting and connect to the Access Point in a minute without any hassle. 3.5G Mimi Router could support both Self-PIN or PBC modes, or use the WPS button (at real panel) to easy enable the WPS function.

PIN model, in which a PIN has to be taken either from a sticker label or from the web interface of the WPS device. This PIN will then be entered in the AP or client WPS device to connect.

PBC model, in which the user simply has to push a button, either an actual or a virtual one, on both WPS devices to connect.

Please follow instructions below to enable the WPS function.

1. Setup Wireless LAN with WPS PIN :

- (1). Get the WPS PIN number from wireless card and write it down.



(2). Fill in the PIN number from the wireless card in Client PIN Number field, and then click "Start PIN".

Wi-Fi Protected Setup

This page allows you to change the setting for WPS (Wi-Fi Protected Setup). Using this feature could let your wireless client automatically synchronize its setting and connect to the Access Point in a minute without any hassle.

Disable WPS

WPS Status: Configured Un-Configured

Reset to UnConfigured

Self-PIN Number: 51039615

Push Button Configuration:

Current Key Info:

Authentication	Encryption	Key
Open	None	N/A

Client PIN Number:

Applied client's PIN successfully!


You have to run Wi-Fi Protected Setup in client within 2 minutes.

(3). Click PIN from Adapter Utility to complete the WPS process with the wireless router.



2. Start PBC:

- (1). Press the WPS button (A) from RB-1842 and wait for Wireless/WPS LED light (B) changed into orange.
- (2). Press the WPS button (C) from the adapter until the setup window shows up.

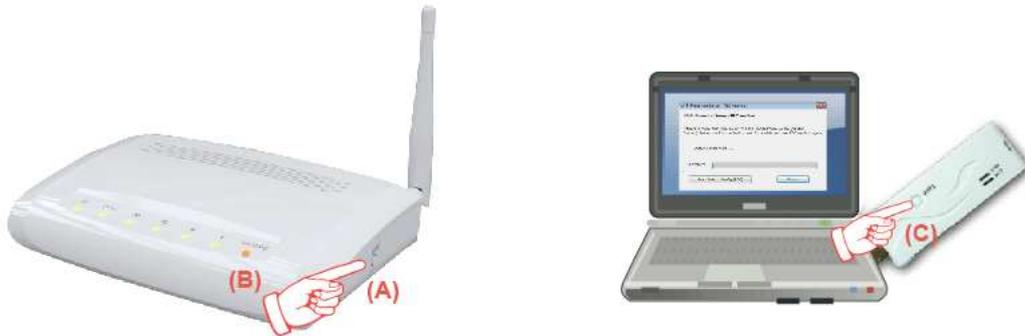

- (3). Open a web browser to check the internet connection.



Please also refer to section 4.1.1 WPS setup for more details.

6.3 System Management

This section including **Change Password, Firmware Upgrade, Profiles Save, Time Zone Setting, UPnP Setting, VPN Pass-through setting and Language Setting**. It is easy and helpful for users making more detailed settings.



6.3.1 Change Password

Users can set or change user name and password used for accessing the web management interface in this section.

Change Password

This page is used to set the account to access the web server of Access Point. Empty user name and password will disable the protection.

User Name:

New Password:

Confirmed Password:

Click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data.

6.3.2 Firmware Upgrade

This function can upgrade the firmware of the router. There is certain risk while doing firmware upgrading. Firmware upgrade is not recommended unless the significant faulty is found and published on official website. If you feel the router has unusual behaviors and is not caused by the ISP and environment. You can check the website (<http://www.amigo.com.tw>) to see if there is any later version of firmware. Download the firmware to your computer, click Browser and point to the new firmware file. Click Upload to upgrade the firmware. You can't make any move unless the machine reboot completely.

Firmware Upgrade

This page allows you upgrade the Access Point firmware to new version. Please note,do not power off the device during the upload because it may crash the system.


Select File:

Caution: To prevent that firmware upgrading is interrupted by other wireless signals and causes failure. We recommend users to use wired connection during upgrading.

Note: The firmware upgrade will not remove your previous settings.

■ **Reset button:**

On the front of this router, there is a reset button. If you cannot login the administrator page by forgetting your password; or the router has problem you can't solve. You can push the reset button for 5 seconds with a stick. The router will reboot and all settings will be restored to factory default settings. If the problem still exists, you can visit our web site to see if there is any firmware for download to solve the problem.

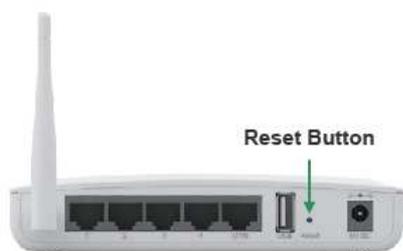


6.3.3 Profile Save

Users can create a backup file that contains current router settings. This backup file can be used to restore router settings. This is especially useful in the event you need to reset the router to its default settings.

1. Save Configuration


(1). Click Save

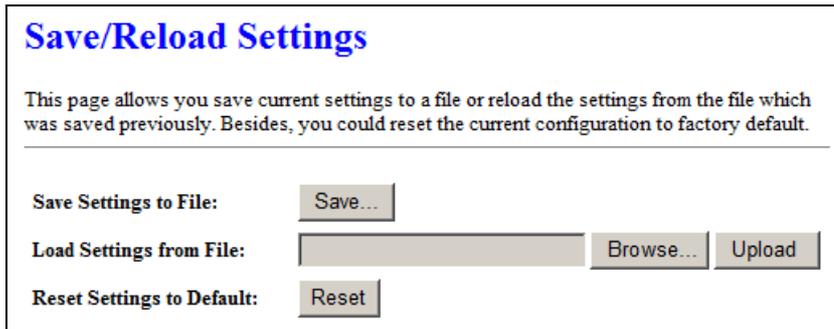

(2). Please click "Save" to save the configuration to your computer.



(3). Select the location which you want to save file, then click Save.

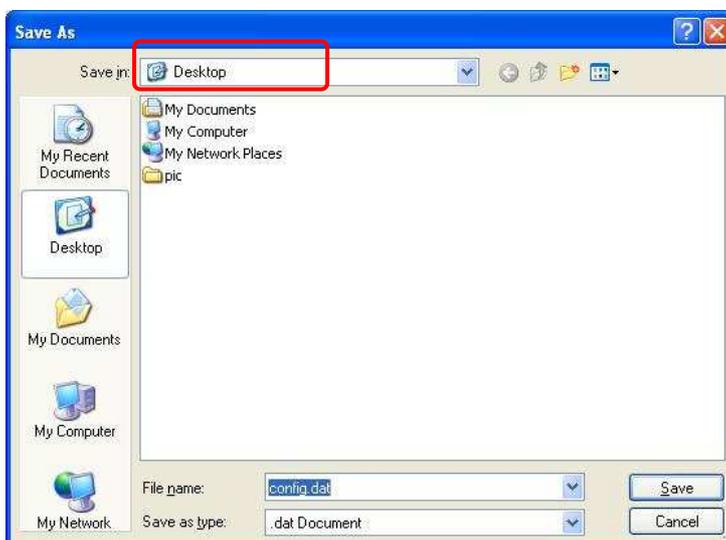

2. Load configuration file

(1). Click Browser

Save/Reload Settings


This page allows you save current settings to a file or reload the settings from the file which was saved previously. Besides, you could reset the current configuration to factory default.

Save Settings to File:

Load Settings from File:

Reset Settings to Default:

(2). Select configuration file then click Open

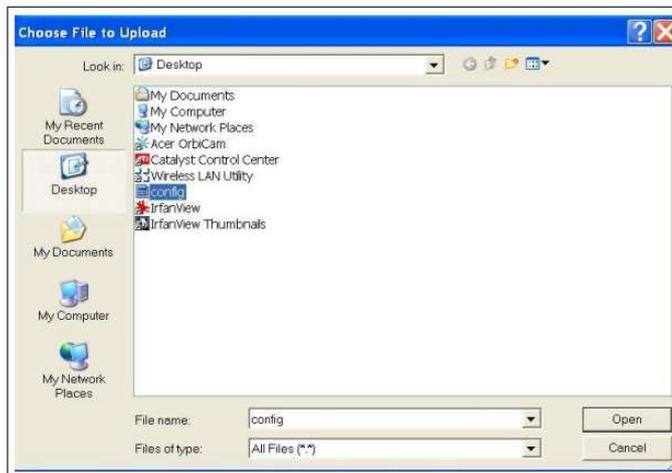

(3). Click Upload to upload configuration file to RB-1842.

Save/Reload Settings

This page allows you save current settings to a file or reload the settings from the file which was saved previously. Besides, you could reset the current configuration to factory default.

Save Settings to File:

Load Settings from File:

Reset Settings to Default:

(4). After 90 seconds, RB-1842 will reboot automatically.

3. Reload factory default setting

(1). Please click Reset

Save/Reload Settings


This page allows you save current settings to a file or reload the settings from the file which was saved previously. Besides, you could reset the current configuration to factory default.

Save Settings to File:

Load Settings from File:

Reset Settings to Default:

(2). Please click OK to start reload factory default setting to RB-1842.

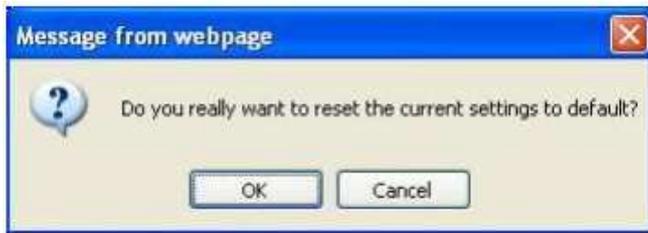

(3). After 90 seconds, RB-1842 will reboot automatically.

6.3.4 Time Zone Setting

Users can synchronize the local clock on the router to an available NTP server (optional). To complete this setting, enable NTP client update and select the correct Time Zone.

Time Zone Setting

You can maintain the system time by synchronizing with a public time server over the Internet.

Current Time : Yr Mon Day Hr Mn Sec

Time Zone Select :

Enable NTP client update

Automatically Adjust Daylight Saving

NTP server :

(Manual IP Setting)

Item	Description
Current Time	Users can input the time manually.
Time Zone Select	Please select the time zone.
Enable NTP client update	Please select to enable NTP client update or not.
Automatically Adjust Daylight Saving	Please select to enable Automatically Adjust Daylight Saving or not.
NTP Server	Please select the NTP server from the pull-down list, or you can enter the NTP server IP address manually.
Apply Changes & Reset & Refresh	Please click on Apply Changes to save the setting data. Or you may click on Reset to clear all the input data. Or you may click on Refresh to update the system time on the screen.

6.3.5 UPnP Setting

Universal Plug and Play (UPnP) is a standard of networking protocols promulgated by the UPnP Forum. The goals of UPnP are to allow devices to connect seamlessly and to simplify the implementation of networks in the home (data sharing, communications, and entertainment) and in corporate environments for simplified installation of computer components. RB-1842 supports UPnP function, and can cooperate with other UPnP devices. When you activate UPnP, please click My Network Places. Users will see an Internet Gateway Device icon. By click the icon, users can enter the GUI of the router. If you do not

wish to use UPnP, you can disable it.

UPnP Setting

In this page, you can turn on or turn off the UPNP feature of your router.

Enable/Disable UPNP: **Enabled** **Disabled**

Enable/Disable UPnP: Select to enable or disable this function.

6.3.6 Language Setting

The RB-1842 provide 12 language for Web GUI. You can select the language interface from the dropdown list and by following steps.

Language Setting

This page allows you setup the GUI language.

Select language:

English	▼
English	
繁體中文	

When you see the screen message change to the selected language, the setup is completed.

語言設定

此頁面可讓您選擇GUI的語言。

選擇語言:

繁體中文	▼
------	---

6.4 Log & Status

The category provides Network Config and Event Log status for users to know the operation status.



6.4.1 Network Config

Users can check the Internet status under this category, including Firmware version, Wireless setting, Connecting Time, WAN, TCP/IP ...information.

Network Config	
This page shows the current status and some basic settings of the device.	
<hr/>	
System	
Uptime	Oday:0h:23m:13s
Firmware Version	Ver1.0.4
WirelessConfiguration	
Mode	AP+WDS
Band	2.4 GHz (B+G+N)
SSID	All_Broadbands_Green_WiFi_Router
Channel Number	1
Encryption	Disabled(AP), Disabled(WDS)
MAC Address	00:e0:4c:81:88:88
Associated Clients	1
WirelessRepeater Interface Configuration	
Mode	Infrastructure Client
ESSID	ESSID_SAPIDO_RB-1842
Encryption	Disabled
MAC Address	00:00:00:00:00:00
State	Scanning
LAN Configuration	
Attain IP Protocol	Fixed IP
IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
DHCP Server	Enabled
MAC Address	00:e0:4c:81:88:88
WAN Configuration	

6.4.2 Event Log

You may enable the event log feature here.

System Log

This page can be used to set remote log server and show the system log.

Enable Log

system all **wireless** **DoS**

Enable Remote Log **Log Server IP Address:**

Item	Description
Enable Log	You may choose to enable Event Log or not.
System all, Wireless, & DoS	Please select the event you want to record.
Enable Remote Log	You may choose to enable the remote event log or not.
Log Server IP Address	Please input the log server IP Address.
Apply Changes & Refresh & Clear	Click on Apply Changes to save the setting data. Click on Refresh to renew the system time, or on Clear to clear all the record.

* The following figure is an example when users click Apply Changes to record the event log.

Enable Log

system all **wireless** **DoS**

Enable Remote Log **Log Server IP Address:**

```

Jan 6 16:45:16 klogd started: BusyBox v1.13.4 (2011-01-06 16:19:05 CST)
Jan 6 16:45:16 RTL8192C/RTL8188C driver version 1.4 (2010-08-11)
Jan 6 16:45:16 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:45:16 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:45:16 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:45:16 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:45:16 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:45:16 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:45:18 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:45:18 wlan0: A wireless client is associated - 00:D0:41:C3:A3:C7
Jan 6 16:46:22 klogd started: BusyBox v1.13.4 (2011-01-06 16:19:05 CST)

```

6.5 Logout

This function logs out the user.

Logout

This page is used to logout.

Do you want to logout ?


Chapter 7 DDNS Service Application

DDNS is a service changes the dynamic IP to the static IP. The settings of DDNS can solve the problem of being given the different IP by router every time. After setting the Router, your host name would correspond to your dynamic IP. Moreover, via the host name application, it could be easier for you to use FTP, Webcam and Printer remotely.

Dynamic DNS allows you to make an assumed name as a dynamic IP address to a static host name. Please configure the dynamic DNS below. Please select **Dynamic DNS** under the **IP Config** folder, and follow the instructions below to enter the **Dynamic DNS** page to configure the settings you want.

If you don't have a DDNS account, please follow the steps to complete your DDNS with Dynamic IP settings.

Step 1. First access the Internet and fill <http://www.dyndns.com/> into the address field of your web browser, then click **Create Account**.

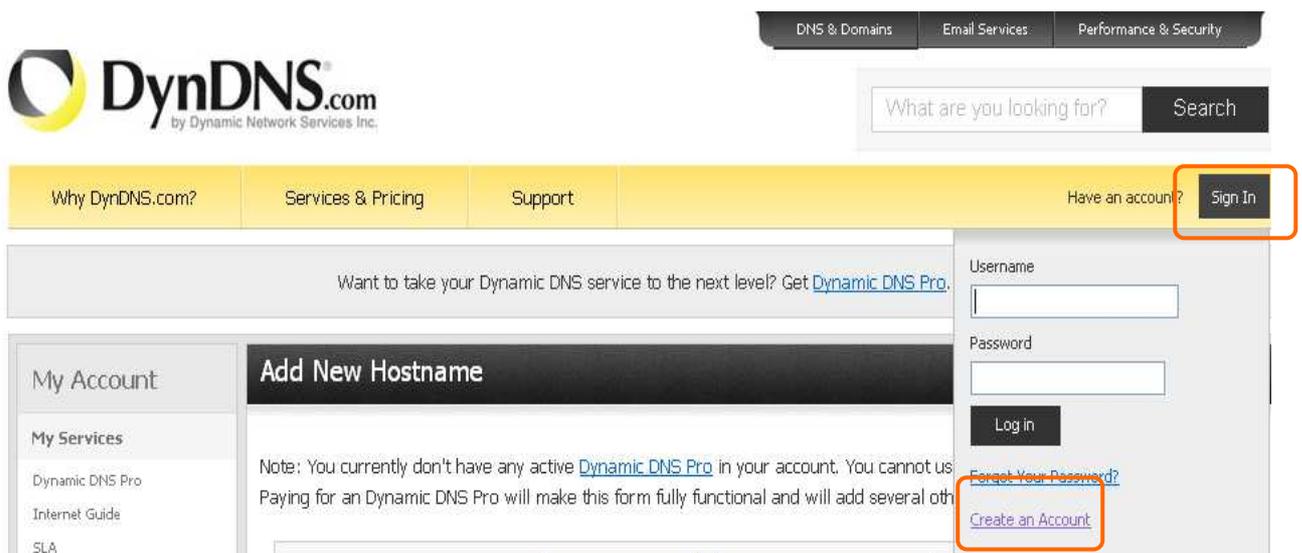

Step 2. Fill in the form as required, and then click on **Create Account** button.

Create an account or log in to continue

Username:
Password:
Confirm password:
Email:
Confirm email:
Subscribe to: DynDNS.com newsletter (1 or 2 per month)
 Dyn Inc. press releases
 Remove HTML formatting from email

Security Image:

Enter the numbers from the above image:

I agree with the [acceptable use policy \(AUP\)](#) and [privacy policy](#).

Already Registered?
Username
Password

[Forgot your password?](#)



 Username Password
[Lost Password?](#) [Create Account](#)

About Services Account Support News

 **One more step to go...**

We've sent an email to joanne@sapido.com.tw, to verify your account. Please check your inbox and click on the confirmation link.

If you do not receive the email in the next few minutes you can try [resending it](#).

Thanks for choosing DynDNS.com!



Step 3. When you got this account created message, close it, and check your mailbox. You would get a mail from DynDNS website.

Step 4. Click on the indicated address within your mail to confirm.


Your DynDNS.com Account ' sapido ' has been created. You need to visit the confirmation address below within 48 hours to complete the account creation process:

<https://www.dyndns.com/account/confirm/BDJZJYlWzdYnrQBVEP1bcQ>

Our basic service offerings are free, but they are supported by our paid services. See <http://www.dyndns.com/services/> for a full listing of all of our available services.

If you did not sign up for this account, this will be the only communication you will receive. All non-confirmed accounts are automatically deleted after 48 hours, and no addresses are kept on file. We apologize for any inconvenience this correspondence may have caused, and we assure you that it was only sent at the request of someone visiting our site requesting an account.

Step 5. Click on **login**.

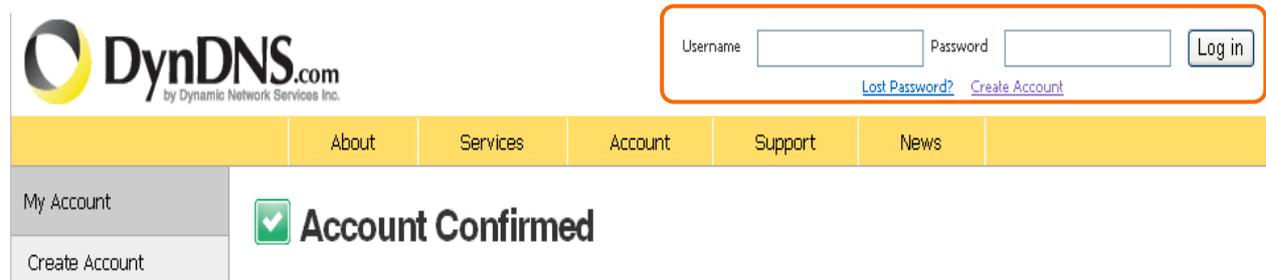

The screenshot shows the DynDNS.com website interface. At the top left is the DynDNS.com logo with the tagline "by Dynamic Network Services Inc.". To the right is a login form with fields for "Username" and "Password", and a "Log in" button. Below the login form are links for "Lost Password?" and "Create Account". A yellow navigation bar contains links for "About", "Services", "Account", "Support", and "News". On the left side, there is a sidebar with "My Account" and "Create Account" options. A large green checkmark icon is followed by the text "Account Confirmed".

Step 6. Click **Add New Hostname**.



Step 7. Put in your favorite hostname and service type, and then click **Create Host** after finished.

Hostname:	<input type="text" value="sapido"/> . <input type="text" value="dyndns.org"/>
Wildcard Status:	Disabled [Want Wildcard support?]
Service Type:	<input checked="" type="radio"/> Host with IP address [?] <input type="radio"/> WebHop Redirect [?] <input type="radio"/> Offline Hostname [?]
IP Address:	<input type="text"/> <small>Your current location's IP address is 220.131.252.40</small>
TTL:	<input type="text" value="60 s. Default dynamic DNS value"/>
Mail Routing:	<input type="checkbox"/> Yes, let me configure Email routing. [?]

What do you want to use this host for?
 Select services and devices you would like to use with this hostname.

Work From Home Office or VPN:

vpn
 remote file access
 remote desktop
 mail server
 web server
 chat server
 ftp backup
 ssh
 database
 voip

Hosting and Design For Web Sites and Blogs:

blog
 gallery
 wiki
 portfolio
 ecommerce
 web page

Remote Access For Devices:

dvr
 webcam
 data storage
 cctv
 printer
 alarm and security
 thermostat
 weather station
 game server
 home automation

[Add To Cart](#)

Step 8. Your hostname has been created when you see the following page.

Your cart contains **free services only**. You will not be asked for credit card information.

Upgrade Options

Free accounts allow only five Dynamic DNS hosts.

- To add more and enjoy [additional benefits](#) for only \$15.00 per year, [purchase Dynamic DNS Pro](#).
- To get Dynamic DNS for **your own domain**, use [Custom DNS](#).

Dynamic DNS Hosts			
sapido.dyndns.org	-	remove	\$0.00

Please enter coupons in the box below and click "Add Coupon".

[Add Coupon](#)

Sub-Total: \$0.00

Order Total: \$0.00

Would you like to [print an estimate/quote?](#)

[Next >>](#)

Step 9. Click “Activate Service”

Free Services Checkout

Once you have confirmed the contents of your cart your services will be instantly activated.

Service	Period	Price
Dynamic DNS Hosts sapido.dyndns.org	-	\$0.00
Sub-Total:		\$0.00
Activate Services >>		

Finish

 **DynDNS.com**
by Dynamic Network Services Inc.

Logged In User: sapido_tw
[My Cart](#) [My Services](#) [Log Out](#)

About Services Account Support News

My Account

My Services

- Dynamic DNS Pro
- Internet Guide
- SLA
- Premier Support
- Zone Level Services
Domain registration and transfer, DNS hosting, MailHop services
- Host Services
Dynamic DNS hosts, WebHop URL Forwarding

Host Services [↑ My Services](#)

sapido.dyndns.org successfully activated.

Hostname	Service	Details	Last Updated
sapido.dyndns.org	Host	220.133.10.40	Mar. 31, 2010 10:24 PM

[> Host Update Logs](#) [Add New Host](#)

Chapter 8 Q & A

8.1 Installation

1. Q: Where is the XDSL Router installed on the network?

A: In a typical environment, the Router is installed between the XDSL line and the LAN. Plug the XDSL Router into the XDSL line on the wall and Ethernet port on the Hub (switch or computer).

2. Q: Why does the throughput seem slow?

A: To achieve maximum throughput, verify that your cable doesn't exceed 100 meter. If you have to do so, we advise you to purchase a bridge to place it in the middle of the route in order to keep the quality of transmitting signal. Out of this condition you would better test something else.

- Verify network traffic does not exceed 37% of bandwidth.
- Check to see that the network does not exceed 10 broadcast messages per second.
- Verify network topology and configuration.

8.2 LED

1. Why doesn't RB-1842 power up?

A: Check if the output voltage is suitable, or check if the power supply is out of order.

2. The Internet browser still cannot find or connect RB-1842 after verifying the IP address and LAN cable, the changes cannot be made, or password is lost.

A: In case RB-1842 is inaccessible; you can try to restore its factory default settings. Please press the "Reset" button and keep it pressed for over 7 seconds and the light of STATUS will vanish. The LEDs will flash again when reset is successful.

3. Why does RB-1842 shut down unexpectedly?

A: Re-plug your power adapter. Then, check the STATUS indicator; if it is off, the internal flash memory is damaged. For more help, please contact with your provider.

8.3 IP Address

1. Q: What is the default IP address of the router for LAN port?

A: The default IP address is 192.168.1.1 with subnet mask 255.255.255.0

2. Q: I don't know my WAN IP.

A: There are two ways to know.

Way 1: Check with your Internet Service Provider.

Way 2: Check the setting screen of RB-1842. Click on **Status & Log** item to select **Network Configuration** on the Main Menu. WAN IP is shown on the WAN interface.

3. How can I check whether I have static WAN IP Address?

A: Consult your ISP to confirm the information, or check Network Configuration in RB-1842 's Main Menu.

4. Will the Router allow me to use my own public IPs and Domain, or do I have to use the IPs provided by the Router?

A: Yes, the Router mode allows for customization of your public IPs and Domain.

8.4 OS Setting

1. Why can't my computer work online after connecting to RB-1842?

A: It's possible that your Internet protocol (TCP/IP) was set to use the following IP address. Please do as the following steps. (Windows 2000 & XP) **Start > Settings > Network and Dial-up Connections >** double click on **Internet Protocol(TCP/IP) >** select **obtain IP address automatically >** Click on **OK** button. Then, open Internet browser for testing. If you still can't go online, please test something else below.

- Verify network configuration by ensuring that there are no duplicate IP addresses.
- Power down the device in question and ping the assigned IP address of the device. Ensure no other device responds to that address.
- Check that the cables and connectors or use another LAN cable.

2. Q: Why can't I connect to the router's configuration utility?

A: Possible Solution 1: Make sure that your Ethernet connect properly and securely. Make sure that you've plugged in the power cord.

Possible Solution 2: Make sure that your PC is using an IP address within the range of 192.168.1.2 to 192.168.1.254. Make sure that the address of the subnet mask is 255.255.255.0. If necessary, the Default Gateway data should be at 192.168.1.1. To verify these settings, perform the following steps:

Windows 2000, or XP Users:

1. Click on Windows **Start** > click on **Run** > input **cmd** > click on **OK** button.
2. At the DOS prompt, type ipconfig/all.
3. Check the IP Address, Subnet Mask, Default Gateway data. Is this data correct? If the data isn't correct. Please input **ipconfig/release** > press **Enter** > input **ipconfig/renew** > press **Enter**.

Possible Solution 3: Verify the connection setting of your Web browser and verify that the HTTP Proxy feature of your Web browser is disabled. Make these verifications so that your Web browser can read configuration pages inside your router. Launch your Web browser.

Internet Explorer Users:

1. Click on **Tools** > **Internet Options** > **Connections tab**.
2. Select **never dial a connection**, click on **Apply** button, and then click on **OK** button.
3. Click on **Tools** and then click on **Internet Options**.
4. Click on **Connections** and then click on **LAN Settings**.
5. Make sure none of the check boxes are selected and click on **OK** button.
6. Click on OK button.

Netscape Navigator Users:

1. Click on **Edit** > **Preferences** > double-click **Advanced** in the Category window.
2. Click on **Proxies** > select **Direct connection to the Internet** > click on **OK** button.
3. Click on **Edit again** and then click on **Preferences**.
4. Under category, double-click on **Advanced** and then click on **Proxies**.
5. Select **Direct connection to the Internet** and click on **OK** button.
6. Click on **OK** button.

3. Q: Web page hangs, corrupt downloads, or nothing but junk characters is being displayed on the screen. What do I need to do?

A: Force your NIC to 10Mbps or half duplex mode, and turn off the "Auto-negotiate" feature of your NIC as a temporary measure. (Please look at the Network Control Panel, in your Ethernet Adapter's Advanced Properties tab.)

4. Q: Why can't I connect to the Web Configuration?

A: you can remove the proxy server settings in your web browser.

8.5 RB-1842 Setup

1. Q: Why does RB-1842's setup page shut down unexpectedly?

A: If one of the pages appears incompletely in RB-1842 's setup pages, please click on Logout item on the Main Menu before shutting it down. Don't keep it working. Then, close Internet browser and open it again for going back to the previous page.

2. Q: Why can't my USB devices and LAN ports work properly after setting the DHCP?

A: There are two rules over here.

Rule1: After connecting USB devices, please reboot your Router.

Rule2: Before finishing the DHCP setup, please don't connect any computer to LAN ports, because the conflict of having the same IP may occur and cause some computers a lot of trouble.

※Notice: Make sure that you always click on the Apply button after configuring each setting. And in order to let other LAN ports work properly, please reboot your PC.

3. Q: I don't know how to configure DHCP.

A: DHCP is commonly used in the large local network. It allows you to manage and distribute IP addresses from 2 to 254 throughout your local network via RB-1842 . Without DHCP, you would have to configure each computer separately. It's very troublesome. Please Open **Internet browser** > Input **192.168.1.1 in the website blank field** > Select **DHCP Server under the IP Config Menu**. For more information, please refer to 3.3.2 (Router Mode) or 4.3.1 (AP Mode).

4. Q: How do I upgrade the firmware of RB-1842 ?

A: Periodically, a new Flash Code is available for RB-1842 on your product supplier's website. Ideally, you should update RB-1842 's Flash Code using **Firmware Upgrade** on the **System Management** menu of RB-1842 Settings.

5. Q: My 11n Mobile Server Router cannot connect to the ISP?

A: There are three possible solutions.

1. Check the Cable/XDSL modem is power on.
2. Check the Cable/XDSL link light is on to verify a good physical connection.
3. Check the WAN port LED to verify if the Cable/XDSL modem is connected to the router:

If your ISP Login method is following, please make sure the username and password are correct or not.

If your ISP is using dynamic IP addressing (DHCP) then the DHCP protocol does not have the authentication feature. Some Cable service providers often use the following to determine user's identification.

6. Q: Why is that I can ping to outside hosts, but cannot access Internet websites?

A: Check the DNS server settings on your PC. You should get the DNS servers settings from your ISP. If your PC is running a DHCP client, remove any DNS IP address setting. As the router assign the DNS settings to the DHCP-client-enabled PC.

7. Q: RB-1842 couldn't save the setting after click on Apply button?

A: RB-1842 will start to run after the setting finished applying, but the setting isn't written into memory. Here we suggest if you want to make sure the setting would be written into memory, please reboot the device via **Reboot** under **System Management** directory.

8.6 Wireless LAN

1. Q: Why couldn't my wireless notebook work on-line after checking?

A: Generally, Wireless networks can sometimes be very complicated to set up, particularly if you're dealing with encryption and products from different vendors. Any number of variables can keep your workstations from talking to each other. Let's go over some of more common ones.

For starters, verify that your router and your workstation are using the same SSID descriptions. SSID acts as a password when a mobile device tries to connect to the wireless network. The SSID also differentiates one WLAN from another, so all access points and all devices attempting to connect to a specific WLAN must use the same SSID. A workstation will not be permitted to connect to the network unless it can provide this unique identifier. This is similar to the function of your network's Workgroup or Domain name.

When you're experiencing conductivity problems, it is always best to keep things simple. So next you are going to do is that, please disable any WEP encryption you might have configured.

Successful implementation of encryption also includes the use of a shared key. A HEX key is the most common, but other formats are also used. This key identifies the workstation to the router as a trusted member of this network. Different manufacturers can implement this key technology in ways that might prevent them from working correctly with another vendor's products. So pay attention to detail is going to be the key to a successful installation.

Next make sure the router and the NIC are configured to use the same communications channel. There are normally 11 of them, and the default channel can also vary from vendor to vendor. You might also want to confirm that the router has DHCP services enabled and an address pool configured. If not, the NIC won't be able to pick up an IP address. I have run across a few access points that offer DHCP services but do not assign all of the needed IP information to the NIC. As a result, I was able to connect to the network, but could not browse the web. The point is, don't assume anything. Verify for yourself that all of the required settings are being received by the workstation.

Finally, you might want to keep the system you're trying to configure in the same room as the router, at least during the initial configuration, in order to minimize potential interference from concrete walls or steel beams.

2. Q: My PC can't locate the Wireless Access Point.

A: Check the following:

- Your PC is set to Infrastructure Mode. (Access Points are always in Infrastructure Mode.)
- The SSID on your PC and the Wireless Access Point are the same. Remember that the SSID is case-sensitive. So, for example "Workgroup" does NOT match "workgroup".
- Both your PC and the Wireless Access Point must have the same setting for WEP. The default setting for the Wireless Router is disabled, so your wireless station should also have WEP disabled.
- If WEP is enabled on the Wireless Router, your PC must have WEP enabled, and the key must match.
- If the Wireless Router's Wireless screen is set to Allow LAN access to selected Wireless Stations only, then each of your Wireless stations must have been selected, or access will be blocked.
- To see if radio interference is causing a problem, see if connection is possible when close to the Wireless Access Point. Remember that the connection range can be as little as 100 feet in poor environments.

3. Q: Wireless connection speed is very slow.

A: The wireless system will connect at highest possible speed, depending on the distance and the environment. To obtain the highest possible connection speed, you can experiment with following:

- Access Point location: Try adjusting the location and orientation of the Access Point.
- Wireless Channel: If interference is the problem, changing to another channel may show a marked improvement.
- Radio Interference: Other devices may be causing interference. You can experiment by switching other devices off, and see if this helps. Any "noisy" devices should be shielded or relocated.
- RF Shielding: Your environment may tend to block transmission between the wireless stations. This will mean high access speed is only possible when close to the Access Point.

4. Q: Some applications do not run properly when using the Wireless Router.

A: The Wireless Router processes the data passing through it, so it is not transparent. Use the Special Application feature to allow the use of Internet applications which do not function correctly. If this does solve the problem, you can use the DMZ function. This should work with almost every application, but:

- It is a security risk, since the firewall is disabled.
- Only one (1) PC can use this feature.

5. Q: I can't connect to the Wireless Router to configure it.

A: Check the following:

- The Wireless Router is properly installed, LAN connections are OK, and it is powered ON.
- Make sure that your PC and the Wireless Router are on the same network segment.
- If your PC is set to "Obtain an IP Address automatically" (DHCP client), restart it.
- If your PC uses a Fixed (Static) IP address, make sure that it is using an IP Address within the range 192.168.1.129 to 192.168.1.253 and thus compatible with the Wireless Router's default IP Address of 192.168.1.254. Also, the Network Mask should be set to 255.255.255.0 to match the Wireless Router. In Windows, you can check these settings by using Control Panel ~ Network to check the Properties for the TCP/IP protocol.

6. Q: The WinXP wireless interface couldn't communicate the WEP with RB-1842's wireless interface.

A: The default WEP of WinXP is **Authentication Open System - WEP**, but the WEP of RB-1842 is only for **Shared Key - WEP**, it caused both sides couldn't communicate. Please select the WEP of WinXP from Authentication Open System to **Pre-shared Key - WEP**, and then the WEP wireless interface between WinXP and RB-1842 would be communicated.

8.7 Support

1. Q: Why can't the NTFS hard disk be used with RB-1842?

A: RB-1842 doesn't support the NTFS hard disk. It only supports EXT3 and FAT32 file systems.

2. Q: Why can't my USB devices work on RB-1842?

A: Maybe your USB devices and RB-1842 are not compatible. So if you want to know whether your inserted device such as USB Web Camera, USB Printer or USB HDD corresponds with RB-1842, please check with your product supplier.

3. Q: What is the maximum number of IP addresses that the XDSL Router will support?

A: The Router will support to 253 IP addresses with NAT mode.

5. Q: Is the Router cross-platform compatible?

A: Any platform that supports Ethernet and TCP/IP is compatible with the Router.

8.8 Others

1. Q: Why can't I receive corrupted FTP downloads?

A: If you are experiencing corrupted files when you download a file with your FTP client, try using another FTP program.

2. Q: Why does the router dial out for PPPoE mode very often?

A: Normally some of game, music or anti-virus program will send out packets that trigger the router to dial out, you can close these programs. Or you can set the idle time to 0, then control to dial out manually.

3. Q: What can I do if there is already a DHCP server in LAN?

A: If there are two DHCP servers existing on the same network, it may cause conflict and generate trouble. In this situation, we suggest to disable DHCP server in router and configure your PC manually.

8.9 USB Device

1. Q: How many USB devices can be connected to the Product?

A: RB-1842 supports only 1 USB ports.

Chapter 9 Appendices

9.1 Operating Systems

1. Microsoft : Windows 2000, XP, Vista, Windows 7.
2. Apple : Mac OS X 10.4.7, Leopard and the following related versions.
3. Linux : Redhat 9, Fedora 6 & 7, Ubuntu 7.04 and the following related versions.

9.2 Browsers

1. Internet Explorer ver. 6 and 7 and the following related versions.
2. FireFox ver. 2.0.0.11 and the following related versions.3.
3. Safari ver. 3.04 and the following related versions.

9.3 Communications Regulation Information

Should any consumers need to learn more information, services and supports, please contact the supplier of your product directly.